

# Cannulated Screws 2.0-7.5

Catalog



Also  
available in  
**STERILE**



# Content

<b>General Information</b> .....	<b>2</b>
<b>Cannulated Screws 2.0/2.7</b>	
• Complete Set .....	8
• Instruments.....	9
• Screw Rack CS 2.0/2.7.....	10
• CS 2.0 .....	10
• CS 2.7 .....	11
<b>Cannulated Screws 2.7/3.5/4.0/4.5</b>	
• Set Options CS 2.7-4.5.....	14
• Screw Rack CS 2.7 .....	17
• CS 2.7, short and long thread.....	17
• Screw Rack CS 3.5 .....	18
• CS 3.5, short and full thread .....	18
• Screw Rack CS 4.0 .....	19
• CS 4.0, short and full thread .....	19
• Screw Rack CS 4.5 .....	20
• CS 4.5, short and full thread .....	20
• CS 4.5, 6 mm thread.....	21
• Instruments .....	22
<b>Cannulated Screws 5.8/6.5/7.5</b>	
• Complete Set CS 5.8.....	30
• CS 5.8, 16 mm thread.....	31
• Complete Set CS 6.5.....	32
• CS 6.5, 16 mm thread.....	33
• CS 6.5, 32 mm thread.....	34
• CS 6.5, full thread .....	35
• Complete Set CS 7.5.....	36
• CS 7.5 8 mm/16 mm thread.....	37
• CS 7.5, 32mm thread .....	38
• CS 7.5, full thread .....	39
• Set Options CS 6.5/7.5 .....	40
• Instruments .....	43
<b>Index (Alphabetical)</b> .....	<b>48</b>
<b>Index (Article numbers)</b> .....	<b>50</b>

# General Information

---

## Quality Standard

---

**aap Implantate AG** develops, produces, and sells surgical implants and instruments. Our Quality Management System covers and manages the entire process, from development to production and sales of the implants and instruments. By directly influencing all parts of the process, we are able to guarantee the highest possible quality of the material, function, and service, together with sustained use of processing materials and resources.

For our implants we use suitable material only, such as titanium alloy. All **aap implants** meet national and international quality standards.

The use of **aap** products with products and/or accessories from other manufacturers has not been tested by **aap** and is excluded.

## Certified Quality

---

The **aap Implantate AG** quality assurance system, pursuant to appendix II of the Medical Device Directive 93/42/EEC, employed in the design, production, and final inspection processes, has been certified by an authority appointed by the European Union. All **aap Implantate AG** products have successfully completed the appropriate conformity assessment procedures and carry the CE mark. **aap Implantate AG** has been certified according to EN ISO 13485 in its current release, the pertinent standards for medical device manufacturers.

## Processing (Sterilization & Cleaning)

---

**aap** markets unsterilized and sterile products. Unsterilized products are appropriately labeled and must be appropriately processed before use (see Instructions for Use, chapter "Processing of products"). Never use damaged implants or implants from damaged packaging.



Further information on the clinical preparation of implants and instruments is described in more detail in the document „Important information“. The document can be accessed and downloaded at any time from our product pages of [www.aap.de](http://www.aap.de) under „Documents“.



[ifu.aap.de](http://ifu.aap.de)

## Access to electronic instructions for use

---

You can view the electronic instructions for use online at [ifu.aap.de](http://ifu.aap.de) via a computer, smartphone or tablet. The documents can be found by entering the article number in the search mask. The article number is indicated on the label by the symbol **REF**.

Please compare the dates in the document history with the manufacturing dates noted on the packaging. Upon request, we will provide you with a printed version within 7 days.

# General Information

---

## Article numbers

---

The **aap** article numbers are defined with reference to the product, i.e. it is possible to read the product group as well as the most important dimensions of the product directly from the article number.

The first letter always designates the product group:

I	Instrument
N	Nails and wires
S	Screws

Example:

SC 4500-32-2	Screw, Cannulated, $\varnothing$ 4.5 mm, fully threaded, length 32 mm
SC 4511-32-2	Screw, Cannulated, $\varnothing$ 4.5 mm, partial thread 11 mm, length 32 mm

If the article number is followed by -2, the product is a pure titanium or a titanium alloy implant. The preceding article number is then identical with that of the same steel implant.

Example:

SK 4500-32	Screw, Kortikalis (cortical), $\varnothing$ 4.5 mm, length 32 mm
SK 4500-32-2	Screw, Kortikalis (cortical), $\varnothing$ 4.5 mm, length 32 mm, TITANIUM

## Abbreviations

---

TL	Thread length
L	Length
CS	Cannulated screw
Width A/F	Width across flats
TITANIUM	Titanium-Alloy and Pure-Titanium

## Packaging/Number of items in package

---

K-wires are available in packages of 10 units.

Washers are available in packages of 5 units.

All other products are offered in single units, and are individually packaged.

## Customer Service

---

We will gladly accept your order or inquiry at:

Phone	+49 30 75019-123
Fax	+49 30 75019-111
Email	customer.service@aap.de

# General Information









## Typical Applications

Cannulated screws can be used as in minimally invasive osteosynthesis and joint reconstruction. Typical anatomies for application are given in the following table:

	Cannulated Screws $\varnothing$ [mm]								
	2.0	2.7	3.5	4.0	4.5	5.8	6.5	7.5	
▶ Glenoid and humeral head		•	•	•	•				
▶ Elbow joint		•	•	•	•				
▶ Distal radius		•	•	•					
▶ Carpal (scaphoid)		•							
▶ Sacroiliac joint, sacrum						•	•	•	
▶ Pelvis, acetabulum					•	•			
▶ Femoral neck							•	•	
▶ Supracondylar fractures of the femur					•	•	•	•	
▶ Tibial head					•	•	•	•	
▶ Pilon tibiale			•	•	•				
▶ Upper ankle joint			•	•	•				
▶ Midfoot		•	•	•					
▶ Ligament avulsion injuries (apophysis)	•		•	•	•				
▶ Calcaneus and talus			•	•	•		•	•	
▶ Arthrodeses of the upper & lower ankle joint						•	•		
▶ Phalanges	•								

# General Information

## Overview Cannulated Screws

			Non-sterile	Sterile		
		2.0	Length mm	Length [mm]	Drill ø mm	K-wire ø mm
Cortical		Short thread	17-24	-	Thread hole 1.7	0.8
		Long thread	8-24	-	Gliding hole 2.0	
		Short thread	10-30	8-34	Thread hole 2.0	1.2
		Long thread	14-32	14-34	Gliding hole 2.7	
		Partial thread	10-60	10-60	Thread hole 2.7	1.2
		Full thread	10-60	10-60	Gliding hole 3.5	
Cancellous		Partial thread	10-60	10-60	Thread hole 2.5	1.2
		Full thread	10-60	10-60	Gliding hole 4.0	
		6 mm thread	20-72	-	Thread hole 3.0	1.6
		Partial thread	20-72	20-72	Gliding hole 4.5	
		Full thread	20-72	20-72		
		16 mm thread	30-100	30-100	Thread hole 4.3	2.0
			16 mm thread	35-120	35-120	Thread hole 4.4
	32 mm thread		45-120	45-120		
	Full thread		35-120	35-120		
		8 mm thread	30-130	30-130	Thread hole 5.0	3.0
16 mm thread		30-130	30-130			
32 mm thread		45-130	45-130			
Full thread		30-130	30-130			

# General Information

## Complete Sets

ART.-NO.	ARTICLE	2.0	2.7	3.5	4.0	4.5	5.8	6.5	7.5
IC 2075-00	Complete Set CS 2.0/2.7	•	•						
IC 2003-00	Complete Set CS 5.8						•		
IC 2005-00	Complete Set CS 6.5							•	
IC 2000-00	Complete Set CS 7.5								•

## Instrument Sets

ART.-NO.	ARTICLE	2.0	2.7	3.5	4.0	4.5	5.8	6.5	7.5
IC 2075-10	Instrument Set CS 2.0/2.7	•	•						
IC 2072-10	Instrument Set CS 2.7-4.5		•	•	•	•			
IC 2072-15	Instrument Set CS 2.7-4.5, small		•	•	•	•			
IC 2072-20	Instrument Set CS 2.0/2.7/3.5	•	•	•					
IC 2072-30	Instrument Set CS 2.7-4.0		•	•	•				
IC 2072-35	Instrument Set CS 2.7/3.5/4.5, small		•	•		•			
IC 2075-35	Instrument Set CS 3.5			•					
IC 2075-40	Instrument Set CS 4.0				•				
IC 2075-45	Instrument Set CS 4.5					•			
IC 2004-10	Instrument Set CS 6.5/7.5							•	•
IC 2001-75	Instrument Set CS 7.5								•

## Screw Sets

ART.-NO.	ARTICLE	2.0	2.7	3.5	4.0	4.5	5.8	6.5	7.5
IC 2041-10	Implant Set CS 2.7 in screw rack		•						
IC 2011-10	Implant Set CS 3.5 in screw rack			•					
IC 2021-10	Implant Set CS 4.0 in screw rack				•				
IC 2031-10	Implant Set CS 4.5 in screw rack					•			
IC 2004-65	Implant Set CS 6.5 in screw tray							•	
IC 2004-75	Implant Set CS 7.5 in screw tray								•



# Cannulated Screws 2.0/2.7


## CS 2.0/2.7

• Complete Set .....	8
• Instruments .....	9
• CS 2.0/2.7 .....	10



# Complete Set 2.0/2.7


## Complete Set CS 2.0/2.7 IC 2075-00

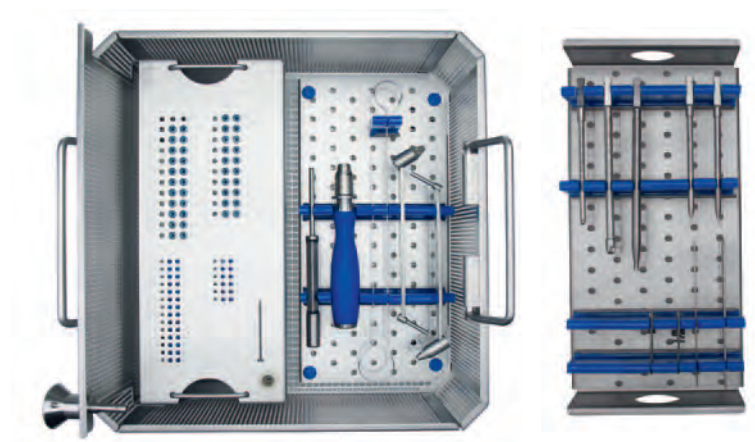

## Instrument Set CS 2.0/2.7 IC 2075-10

ARTICLE	QUANTITY	ART.-NO.
Tray for instruments CS 2.0/2.7, empty	1	IC 2075-01
Lid for trays, small	1	IC 2007-00
Screw rack CS 2.0/2.7, empty	1	IC 2051-00
Staple for washers	2	IC 0005-00
Drill guide CS 2.0, drill $\varnothing$ 1.7, with wire guide	1	IS 1006-17
Drill guide CS 2.7, drill $\varnothing$ 2.0, with wire guide	1	IS 1006-20
Screwdriver cannul. CS 2.0, T6, quick coupling	2	IS 1205-08
Screwdriver cannul. CS 2.7, hex 2.5, quick coupling	1	IS 1205-12
Countersink CS 2.0, quick coupling	1	IS 1305-08
Countersink CS 2.7-4.5, quick coupling	1	IS 1305-16
Cleaning wire $\varnothing$ 0.8, CS 2.0	1	IS 1702-08
Cleaning wire $\varnothing$ 1.2, CS 2.7-4.0	1	IS 1702-12
Direct measuring device, L 100, close, CS 2.0	1	IS 7910-00
Small cannulated handle, quick coupling	1	IU 7704-00
Drill CS 2.0, $\varnothing$ 1.7, L 85, quick coupl., sterile, single use	1	IU 7017-05
Drill CS 2.7, $\varnothing$ 2.0, L 105, quick coupl., sterile, single use	1	IU 7020-05
K-wire with trocar point $\varnothing$ 0.8, L 100	5	NK 0008-10
K-wire with trocar point $\varnothing$ 1.2, L 100	5	NK 0012-10

# Instruments 2.0/2.7



- ▶ IS 1006-17 Drill guide CS 2.0, drill  $\varnothing$ 1.7, with wire guide
- ▶ IS 1006-20 Drill guide CS 2.7, drill  $\varnothing$ 2.0, with wire guide



- ▶ IS 1205-08 Screwdriver cannul. CS 2.0, T6, quick coupling



- ▶ IS 1205-12 Screwdriver cannul. CS 2.7, hex 2.5, quick coupling



- ▶ IS 1305-08 Countersink CS 2.0, quick coupling



- ▶ IS 1305-16 Countersink CS 2.7-4.5, quick coupling



- ▶ IS 1702-08 Cleaning wire  $\varnothing$ 0.8, CS 2.0
- ▶ IS 1702-12 Cleaning wire  $\varnothing$ 1.2, CS 2.7



- ▶ IS 7910-00 Direct measuring device, L 100, closed, CS 2.0



- ▶ IU 7704-00 Small cannulated handle, quick coupling



- ▶ IU 7017-05 Drill CS 2.0,  $\varnothing$ 1.7, L 85, quick coupling, sterile, single use



- ▶ IU 7020-05 Drill CS 2.7,  $\varnothing$ 2.0, L 105, quick coupling, sterile, single use

# Cannulated Screws 2.0/2.7

## Screw rack CS 2.0/2.7 IC 2051-10

- ▶ complete



ARTICLE	ART.-NO.
Screw rack CS 2.0/2.7, empty	IC 2051-00

## CS 2.0

- ▶ self-tapping, forward and reverse
- ▶ self-drilling
- ▶ Titanium-Alloy



LENGTH mm	QUANTITY	SHORT THREAD		LONG THREAD	
		THREAD mm	ART.-NO.	THREAD mm	ART.-NO.
8	2	-	-	4	SC 2050-08-2
10	2	-	-	4	SC 2050-10-2
11	2	-	-	5	SC 2050-11-2
12	2	-	-	5	SC 2050-12-2
13	2	-	-	6	SC 2050-13-2
14	2	-	-	6	SC 2050-14-2
15	2	-	-	6	SC 2050-15-2
16	2	-	-	7	SC 2050-16-2
17	2	5	SC 2030-17-2	8	SC 2050-17-2
18	2	5	SC 2030-18-2	8	SC 2050-18-2
19	2	5	SC 2030-19-2	9	SC 2050-19-2
20	2	5	SC 2030-20-2	9	SC 2050-20-2
22	2	5	SC 2030-22-2	10	SC 2050-22-2
24	2	6	SC 2030-24-2	10	SC 2050-24-2

Thread Cortical  
 Thread- $\emptyset$  2.0 mm  
 Core- $\emptyset$  1.7 mm  
 Stem- $\emptyset$  1.65 mm  
 Hole- $\emptyset$  0.9 mm  
 Width A/F T6  
 Head- $\emptyset$  2.75 mm

# Cannulated Screws 2.0/2.7

Thread	Cortical
Thread- $\emptyset$	2.7 mm
Core	2.0 mm
Stem- $\emptyset$	2.0 mm
Hole- $\emptyset$	1.35 mm
Width A/F	2.5 mm
Head- $\emptyset$	5.0 mm
K-wiret- $\emptyset$	1.2 mm
Drill- $\emptyset$	2.0 mm

## CS 2.7

- ▶ self-tapping, forward and reverse
- ▶ self-drilling
- ▶ Titanium-Alloy



LENGTH mm	QUANTITY*	THREAD mm	SHORT THREAD		THREAD mm	LONG THREAD	
			ART.-NO.* NON-STERILE	ART.-NO. STERILE		ART.-NO.* NON-STERILE	ART.-NO. STERILE
8	-	4	-	SC 2730-08-2S	-	-	-
10	2	4	SC 2704-10-2	SC 2730-10-2S	-	-	-
12	2	4	SC 2704-12-2	SC 2730-12-2S	-	-	-
14	2	4	SC 2704-14-2	SC 2730-14-2S	6	SC 2706-14-2	SC 2750-14-2S
16	2	4	SC 2704-16-2	SC 2730-16-2S	7	SC 2707-16-2	SC 2750-16-2S
18	2	5	SC 2705-18-2	SC 2730-18-2S	8	SC 2708-18-2	SC 2750-18-2S
20	2	5	SC 2705-20-2	SC 2730-20-2S	9	SC 2709-20-2	SC 2750-20-2S
22	2	5	SC 2705-22-2	SC 2730-22-2S	10	SC 2710-22-2	SC 2750-22-2S
24	2	6	SC 2706-24-2	SC 2730-24-2S	10	SC 2710-24-2	SC 2750-24-2S
26	2	6	SC 2706-26-2	SC 2730-26-2S	10	SC 2712-26-2	SC 2750-26-2S
28	2	6	SC 2706-28-2	SC 2730-28-2S	12	SC 2712-28-2	SC 2750-28-2S
30	2	6	SC 2706-30-2	SC 2730-30-2S	14	SC 2714-30-2	SC 2750-30-2S
32	2	6	-	SC 2730-32-2S	14	SC 2714-32-2	SC 2750-32-2S
34	-	7	-	SC 2730-34-2S	15	-	SC 2750-34-2S

\*in IC 2051-10




## Washer

- ▶ 5 pcs./package
- ▶ Titanium-Alloy
- ▶ incl. IC 0005-00 staple for washers (QTY: 1)

INNER- $\emptyset$ mm	OUTER- $\emptyset$ mm	QUANTITY*	TITANIUM ART.-NO.
2.2	4.5	5	SU 0205-00-2
4.0	8.0	5	SU 0407-00-2

\*in IC 2075-00

- ◆ **CAUTION STERILE:** Washers are not yet available in sterile condition. Please order separately and add washers to the instrument tray, if you decide for sterile screws.

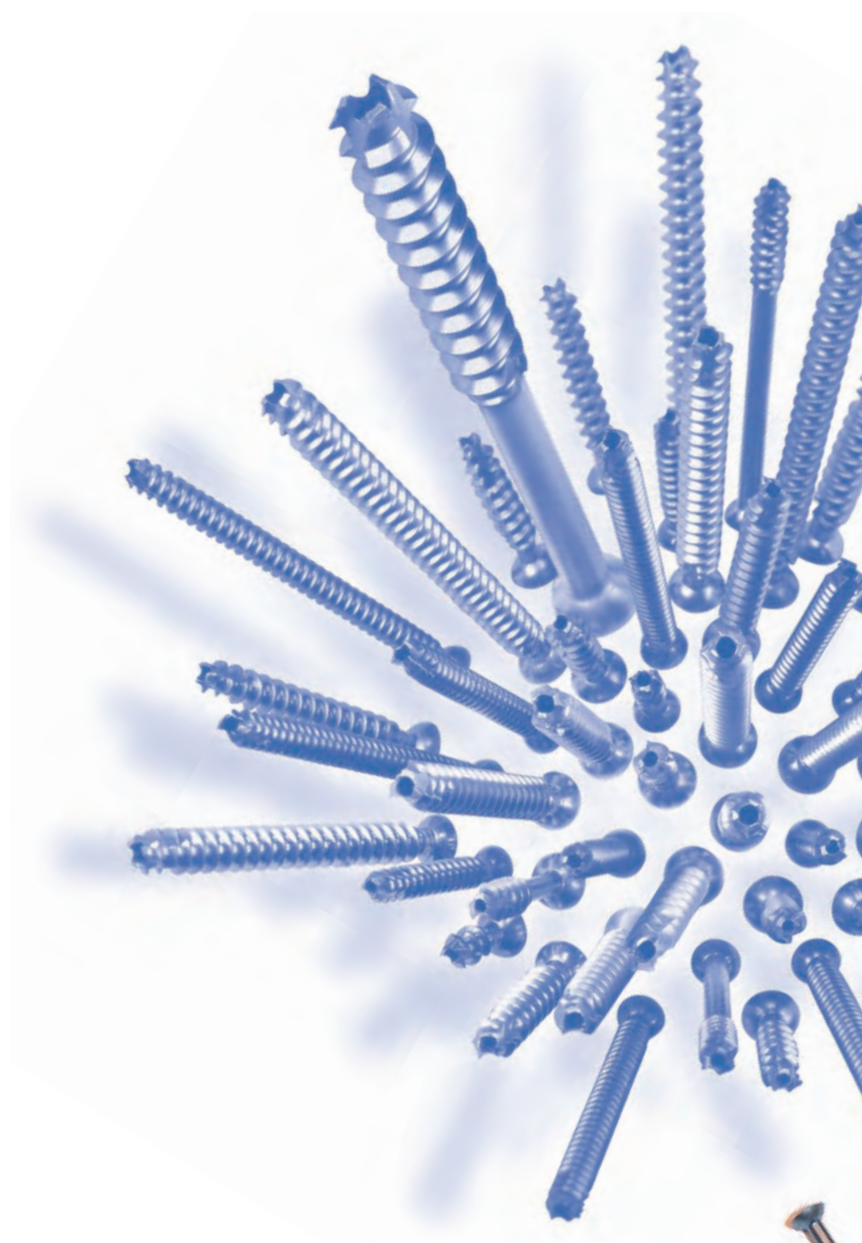


# Cannulated Screws 2.7/3.5/4.0/4.5

<b>CS 2.7/3.5/4.0/4.5</b>	
• Set options 2.7-4.5 .....	14
• Washer .....	16
• Screw Rack CS 2.7 .....	17
• CS 2.7, short & long thread .....	17
• Screw Rack CS 3.5 .....	18
• CS 3.5, short & full thread .....	18
• Screw Rack CS 4.0 .....	19
• CS 4.0, short & full thread .....	19
• Screw Rack CS 4.5 .....	20
• CS 4.5, short & full thread .....	20
• CS 4.5, 6 mm thread .....	21
• Instruments .....	22



## Set Options CS 2.7-4.5

### Set of Instruments CS 2.7-4.5 IC 2072-10

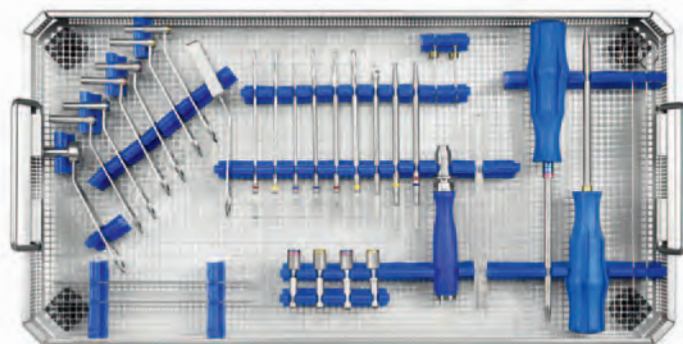


ARTICLE	QUANTITY	ART.-NO.
Tray for CS 2.7-4.5, empty, Special	1	IC 2071-10
Lid for trays, large	1	IC 2008-00

ARTICLE	QUANTITY	ART.-NO.
Staple for washers	2	IC 0005-00
Tissue protection sleeve CS 2.7-4.5	1	IS 1004-00
Obturator CS 2.7-4.0	1	IS 1005-12
Obturator CS 4.5	1	IS 1005-16
Drill sleeve CS 4.0, I- $\varnothing$ 2.6	1	IS 1006-25
Drill sleeve CS 3.5, I- $\varnothing$ 2.8	1	IS 1006-27
Drill sleeve CS 4.5, I- $\varnothing$ 3.1	1	IS 1006-30
Drill sleeve CS 3.5, I- $\varnothing$ 3.6	1	IS 1006-35
Drill sleeve CS 4.0, I- $\varnothing$ 4.1	1	IS 1006-40
Drill sleeve CS 4.5, I- $\varnothing$ 4.6	1	IS 1006-45
Screwdriver cannulated CS 2.7-4.0, hexagonal $\varnothing$ 2.5	1	IS 1203-12
Screwdriver cannulated CS 4.5, hexagonal $\varnothing$ 2.5	1	IS 1203-16
Screwdriver cannulated CS 2.7-4.0, hexagonal $\varnothing$ 2.5, quick coupling	1	IS 1205-12
Screwdriver cannulated CS 4.5, hexagonal $\varnothing$ 2.5, quick coupling	1	IS 1205-16
Countersink CS 2.7-4.5, quick coupling	1	IS 1305-16
Parallel drill guide CS 3.5-4.5, basic device	1	IS 1602-00
Drill guide insert, CS 2.7-4.0	1	IS 1602-12
Drill guide insert CS 4.5	1	IS 1602-16
Cleaning wire $\varnothing$ 1.2, CS 2.7-4.0	1	IS 1702-12
Cleaning wire $\varnothing$ 1.6, CS 4.5	1	IS 1702-16
Drill CS 4.0, $\varnothing$ 2.5, L 130, quick coupling	1	IU 7025-13
Drill CS 2.7/3.5, $\varnothing$ 2.7, L 130, quick coupling	1	IU 7027-13
Drill CS 4.5, $\varnothing$ 3.0, L 130, quick coupling	1	IU 7030-13
Drill CS 3.5, $\varnothing$ 3.5, L 130, quick coupling	1	IU 7035-13
Drill CS 4.0, $\varnothing$ 4.0, L 130, quick coupling	1	IU 7040-13
Drill CS 4.5, $\varnothing$ 4.5, L 130, quick coupling	1	IU 7045-13
Small handle for quick coupling, cannulated	1	IU 7704-00
Direct measuring device, L 150, CS 2.7-4.5	1	IU 7915-02
K-wire with trocar point, $\varnothing$ 1.2, L 150	5	NK 0012-15
K-wire with trocar point and thread. $\varnothing$ 1.6, L 150	5	NK 1016-15
Washer, I- $\varnothing$ 4.0, O- $\varnothing$ 8.0, Titanium	5	SU 0407-00-2
Washer, I- $\varnothing$ 4.5, O- $\varnothing$ 8.0, Titanium	5	SU 0508-00-2



## Set Options CS 2.7-4.5




### Set of Instruments CS 2.7-4.5, small IC 2072-15

ARTICLE	QUANTITY	ART.-NO.
Tray for instruments CS 2.7-4.5, small	1	IC 2072-16
Insert for instruments, empty	1	IC 2072-17
Lid for trays, small	1	IC 2007-00

ARTICLE	QUANTITY	ART.-NO.
Staple for washers	2	IC 0005-00
Tissue protection sleeve CS 2.7-4.5	1	IS 1004-00
Obturator CS 2.7-4.0	1	IS 1005-12
Obturator CS 4.5	1	IS 1005-16
Drill sleeve CS 4.0, I- $\varnothing$ 2.6	1	IS 1006-25
Drill sleeve CS 3.5, I- $\varnothing$ 2.8	1	IS 1006-27
Drill sleeve CS 4.5, I- $\varnothing$ 3.1	1	IS 1006-30
Drill sleeve CS 3.5, I- $\varnothing$ 3.6	1	IS 1006-35
Drill sleeve CS 4.0, I- $\varnothing$ 4.1	1	IS 1006-40
Drill sleeve CS 4.5, I- $\varnothing$ 4.6	1	IS 1006-45
Screwdriver cannulated CS 2.7-4.0, hexagonal $\varnothing$ 2.5	1	IS 1203-12
Screwdriver cannulated CS 4.5, hexagonal $\varnothing$ 2.5	1	IS 1203-16
Screwdriver cannulated CS 2.7-4.0, hexagonal $\varnothing$ 2.5, quick coupling	1	IS 1205-12
Screwdriver cannulated CS 4.5, hexagonal $\varnothing$ 2.5, quick coupling	1	IS 1205-16
Countersink for CS 2.7-4.5, quick coupling	1	IS 1305-16
Parallel drill guide CS 2.7-4.5, basic device	1	IS 1602-00
Drill guide insert, CS 2.7-4.0	1	IS 1602-12
Drill guide insert, CS 4.5	1	IS 1602-16
Cleaning wire $\varnothing$ 1.2, CS 2.7-4.0	1	IS 1702-12
Cleaning wire $\varnothing$ 1.6, CS 4.5	1	IS 1702-16
Drill CS 4.0, $\varnothing$ 2.5, L 130, quick coupling	1	IU 7025-13
Drill CS 2.7/3.5, $\varnothing$ 2.7, L 130, quick coupling	1	IU 7027-13
Drill CS 4.5, $\varnothing$ 3.0, L 130, quick coupling	1	IU 7030-13
Drill CS 3.5, $\varnothing$ 3.5, L 130, quick coupling	1	IU 7035-13
Drill CS 4.0, $\varnothing$ 4.0, L 130, quick coupling	0	IU 7040-13
Drill CS 4.5, $\varnothing$ 4.5, L 130, quick coupling	0	IU 7045-13
Small handle for quick coupling, cannulated	1	IU 7704-00
Direct measuring device, L 150, CS 2.7-4.5	1	IU 7915-02
K-wire with trocar point, $\varnothing$ 1.2, L 150	5	NK 0012-15
K-wire with trocar point and thread, $\varnothing$ 1.6, L 150	5	NK 1016-15
Washer, I- $\varnothing$ 4.0, O- $\varnothing$ 8.0 Titanium	5	SU 0407-00-2
Washer, I- $\varnothing$ 4.5, O- $\varnothing$ 8.0 Titanium	5	SU 0508-00-2

## Set Options CS 2.7-4.5

### Basic Trays for Screw Racks CS 2.7-4.5

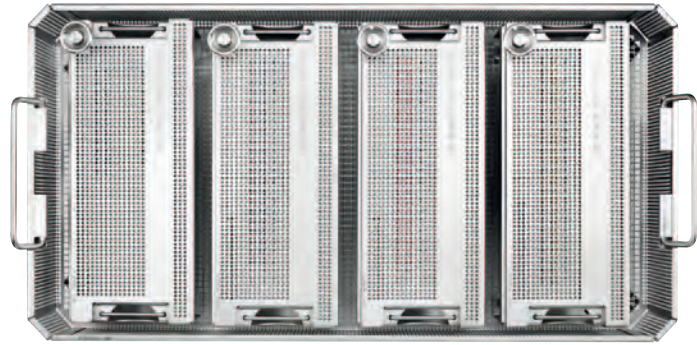

ARTICLE	ART.-NO.
Basic tray for 4 Screw racks CS 2.7-4.5, empty	IC 2073-00
Lid for trays, large	IC 2008-00
Basic tray for 2 Screw racks CS 2.7-4.5, empty	IC 2073-10
Lid for trays, small	IC 2007-00

### Instrument Set Options

ARTICLE	ART.-NO.
Complete Set of instruments CS 2.0/2.7/3.5, small	IC 2072-20
Complete Set of instruments CS 2.7-4.0, small	IC 2072-30
Complete Set of instruments CS 2.7/3.5/4.5, small	IC 2072-35
Set of instruments CS 3.5	IC 2075-35
Set of instruments CS 4.0	IC 2075-40
Set of instruments CS 4.5	IC 2075-45

### Washer

- ▶ 5 pcs./package
- ▶ Titanium-Alloy



FOR SCREWS $\emptyset$	INNER- $\emptyset$ mm	OUTER- $\emptyset$ mm	QUANTITY	ART.-NO.
2.7/3.5	4.0	8.0	5	SU 0407-00-2
4.0/4.5	4.5	8.0	5	SU 0508-00-2

# Cannulated Screws 2.7



## Screw Rack CS 2.7 IC 2041-10

- ▶ with screws
- ▶ for instrument sets see pages 14-16

ARTICLE	ART.-NO.
Screw rack for CS 2.7 with lid, empty	IC 2041-11

Thread	Cortical
Thread- $\emptyset$	2.7 mm
Core- $\emptyset$	2.0 mm
Stem- $\emptyset$	2.0 mm
Hole- $\emptyset$	1.35 mm
Width A/F	2.5 mm
Head- $\emptyset$	5.0 mm
K-wire- $\emptyset$	1.2 mm
Drill- $\emptyset$	2.0 mm

## CS 2.7

- ▶ self-tapping, forward and reverse
- ▶ self-drilling
- ▶ Titanium-Alloy



LENGTH mm	QUANTITY*	SHORT THREAD			LONG THREAD		
		THREAD mm	ART.-NO.* NON-STERILE	ART.-NO. STERILE	THREAD mm	ART.-NO.* NON-STERILE	ART.-NO. STERILE
8	-	4	-	SC 2730-08-2S	-	-	-
10	2	4	SC 2704-10-2	SC 2730-10-2S	-	-	-
12	2	4	SC 2704-12-2	SC 2730-12-2S	-	-	-
14	2	4	SC 2704-14-2	SC 2730-14-2S	6	SC 2706-14-2	SC 2750-14-2S
16	2	4	SC 2704-16-2	SC 2730-16-2S	7	SC 2707-16-2	SC 2750-16-2S
18	2	5	SC 2705-18-2	SC 2730-18-2S	8	SC 2708-18-2	SC 2750-18-2S
20	2	5	SC 2705-20-2	SC 2730-20-2S	9	SC 2709-20-2	SC 2750-20-2S
22	2	5	SC 2705-22-2	SC 2730-22-2S	10	SC 2710-22-2	SC 2750-22-2S
24	2	6	SC 2706-24-2	SC 2730-24-2S	10	SC 2710-24-2	SC 2750-24-2S
26	2	6	SC 2706-26-2	SC 2730-26-2S	10	SC 2712-26-2	SC 2750-26-2S
28	2	6	SC 2706-28-2	SC 2730-28-2S	12	SC 2712-28-2	SC 2750-28-2S
30	2	6	SC 2706-30-2	SC 2730-30-2S	14	SC 2714-30-2	SC 2750-30-2S
32	2	6	-	SC 2730-32-2S	14	SC 2714-32-2	SC 2750-32-2S
34	-	7	-	SC 2730-34-2S	15	-	SC 2750-34-2S


\*in IC 2041-10

# Cannulated Screws 3.5

## Screw Rack CS 3.5

### IC 2011-10

- ▶ with screws
- ▶ for instrument sets see pages 14-16

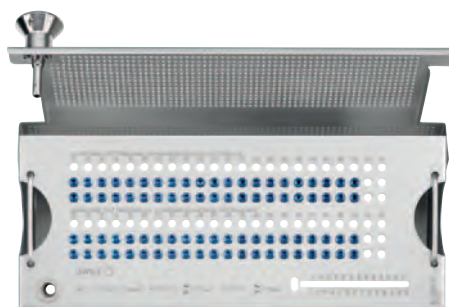

ARTICLE	ART.-NO.
Screw rack for CS 3.5 with lid, empty	IC 2011-11

## CS 3.5

- ▶ self-tapping, forward and reverse
- ▶ self-drilling  
Titanium-Alloy


Thread	Cortical
Thread- $\emptyset$	3.5 mm
Core- $\emptyset$	2.5 mm
Stem- $\emptyset$	2.5 mm
Hole- $\emptyset$	1.35 mm
Width A/F	2.5 mm
Head- $\emptyset$	5.0 mm
K-wire- $\emptyset$	1.2 mm
Drill- $\emptyset$	2.7 mm



LENGTH mm	QUANTITY*	THREAD mm	SHORT THREAD		FULL THREAD		
			ART.-NO.* NON-STERILE	THREAD mm	ART.-NO. STERILE	ART.-NO.* NON-STERILE	ART.-NO. STERILE
10	2	4	SC 3504-10-2	4	SC 3530-10-2S	SC 3500-10-2	SC 3500-10-2S
12	2	4	SC 3504-12-2	4	SC 3530-12-2S	SC 3500-12-2	SC 3500-12-2S
14	2	5	SC 3505-14-2	5	SC 3530-14-2S	SC 3500-14-2	SC 3500-14-2S
16	2	5	SC 3505-16-2	5	SC 3530-16-2S	SC 3500-16-2	SC 3500-16-2S
18	2	6	SC 3506-18-2	6	SC 3530-18-2S	SC 3500-18-2	SC 3500-18-2S
20	2	7	SC 3507-20-2	7	SC 3530-20-2S	SC 3500-20-2	SC 3500-20-2S
22	2	7	SC 3507-22-2	7	SC 3530-22-2S	SC 3500-22-2	SC 3500-22-2S
24	2	8	SC 3508-24-2	8	SC 3530-24-2S	SC 3500-24-2	SC 3500-24-2S
26	2	8	SC 3508-26-2	8	SC 3530-26-2S	SC 3500-26-2	SC 3500-26-2S
28	2	9	SC 3509-28-2	9	SC 3530-28-2S	SC 3500-28-2	SC 3500-28-2S
30	2	10	SC 3510-30-2	10	SC 3530-30-2S	SC 3500-30-2	SC 3500-30-2S
32	2	10	SC 3510-32-2	11	SC 3530-32-2S	SC 3500-32-2	SC 3500-32-2S
34	2	10	SC 3510-34-2	11	SC 3530-34-2S	SC 3500-34-2	SC 3500-34-2S
36	2	10	SC 3510-36-2	12	SC 3530-36-2S	SC 3500-36-2	SC 3500-36-2S
38	2	10	SC 3510-38-2	12	SC 3530-38-2S	SC 3500-38-2	SC 3500-38-2S
40	2	10	SC 3510-40-2	13	SC 3530-40-2S	SC 3500-40-2	SC 3500-40-2S
42	2	10	SC 3510-42-2	14	SC 3530-42-2S	SC 3500-42-2	SC 3500-42-2S
44	2	10	SC 3510-44-2	14	SC 3530-44-2S	SC 3500-44-2	SC 3500-44-2S
46	2	10	SC 3510-46-2	15	SC 3530-46-2S	SC 3500-46-2	SC 3500-46-2S
48	2	10	SC 3510-48-2	15	SC 3530-48-2S	SC 3500-48-2	SC 3500-48-2S
50	2	10	SC 3510-50-2	16	SC 3530-50-2S	SC 3500-50-2	SC 3500-50-2S
55	-	18	SC 3530-55-2	18	SC 3530-55-2S	SC 3500-55-2	SC 3500-55-2S
60	-	20	SC 3530-60-2	20	SC 3530-60-2S	SC 3500-60-2	SC 3500-60-2S

\*in IC 2011-10

# Cannulated Screws 4.0

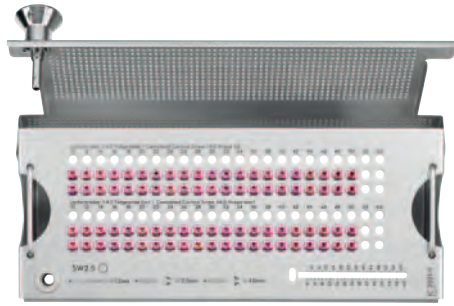

## Screw Rack CS 4.0 IC 2021-10

- ▶ with screws
- ▶ for instrument sets see pages 14–16

ARTICLE	ART.-NO.
Screw rack for CS 4.0 with lid, empty	IC 2021-11

Thread	Cancellous
Thread- $\emptyset$	4.0 mm
Core- $\emptyset$	2.3 mm
Stem- $\emptyset$	2.3 mm
Hole- $\emptyset$	1.35 mm
Width A/F	2.5 mm
Head- $\emptyset$	6.0 mm
K-wire- $\emptyset$	1.2 mm
Drill- $\emptyset$	2.5 mm



## CS 4.0

- ▶ self-tapping, forward and reverse
- ▶ self-drilling
- ▶ Titanium-Alloy


LENGTH mm	QUANTITY*	THREAD mm	SHORT THREAD		FULL THREAD		
			ART.-NO.* NON-STERILE	THREAD mm	ART.-NO. STERILE	ART.-NO.* NON-STERILE	ART.-NO. STERILE
10	2	5	SC 4005-10-2	5	SC 4030-10-2S	SC 4000-10-2	SC 4000-10-2S
12	2	5	SC 4005-12-2	5	SC 4030-12-2S	SC 4000-12-2	SC 4000-12-2S
14	2	5	SC 4005-14-2	5	SC 4030-14-2S	SC 4000-14-2	SC 4000-14-2S
16	2	6	SC 4006-16-2	5	SC 4030-16-2S	SC 4000-16-2	SC 4000-16-2S
18	2	7	SC 4007-18-2	6	SC 4030-18-2S	SC 4000-18-2	SC 4000-18-2S
20	2	8	SC 4008-20-2	7	SC 4030-20-2S	SC 4000-20-2	SC 4000-20-2S
22	2	9	SC 4009-22-2	7	SC 4030-22-2S	SC 4000-22-2	SC 4000-22-2S
24	2	10	SC 4010-24-2	8	SC 4030-24-2S	SC 4000-24-2	SC 4000-24-2S
26	2	12	SC 4012-26-2	9	SC 4030-26-2S	SC 4000-26-2	SC 4000-26-2S
28	2	14	SC 4014-28-2	9	SC 4030-28-2S	SC 4000-28-2	SC 4000-28-2S
30	2	14	SC 4014-30-2	10	SC 4030-30-2S	SC 4000-30-2	SC 4000-30-2S
32	2	15	SC 4015-32-2	11	SC 4030-32-2S	SC 4000-32-2	SC 4000-32-2S
34	2	15	SC 4015-34-2	11	SC 4030-34-2S	SC 4000-34-2	SC 4000-34-2S
36	2	15	SC 4015-36-2	12	SC 4030-36-2S	SC 4000-36-2	SC 4000-36-2S
38	2	16	SC 4016-38-2	12	SC 4030-38-2S	SC 4000-38-2	SC 4000-38-2S
40	2	16	SC 4016-40-2	13	SC 4030-40-2S	SC 4000-40-2	SC 4000-40-2S
42	2	16	SC 4016-42-2	14	SC 4030-42-2S	SC 4000-42-2	SC 4000-42-2S
44	2	17	SC 4017-44-2	14	SC 4030-44-2S	SC 4000-44-2	SC 4000-44-2S
46	2	17	SC 4017-46-2	15	SC 4030-46-2S	SC 4000-46-2	SC 4000-46-2S
48	2	18	SC 4018-48-2	15	SC 4030-48-2S	SC 4000-48-2	SC 4000-48-2S
50	2	18	SC 4018-50-2	16	SC 4030-50-2S	SC 4000-50-2	SC 4000-50-2S
55	-	18	SC 4030-55-2	18	SC 4030-55-2S	SC 4000-55-2	SC 4000-55-2S
60	-	20	SC 4030-60-2	20	SC 4030-60-2S	SC 4000-60-2	SC 4000-60-2S

\*in IC 2021-10

# Cannulated Screws 4.5

## Screw Rack CS 4.5 IC 2031-10

- ▶ with screws
- ▶ for instrument sets see pages 14-16

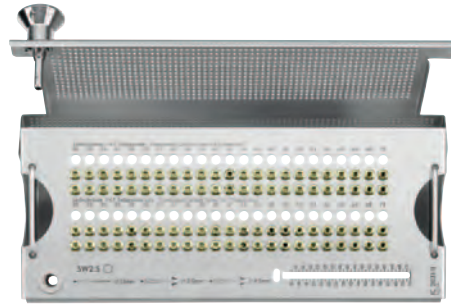

ARTICLE	ART.-NO.
Screw rack for CS 4.5 with lid, empty	IC 2031-11

### CS 4.5

- ▶ self-tapping, forward and reverse
- ▶ self-drilling
- ▶ Titanium-Alloy

	Thread	Spongiosa
Thread- $\emptyset$	4.5 mm	
Core- $\emptyset$	2.8 mm	
stem- $\emptyset$	2.8 mm	
Hole- $\emptyset$	1.75 mm	
Width A/F	2.5 mm	
Head- $\emptyset$	6.0 mm	
K-wire- $\emptyset$	1.6 mm	
Drill- $\emptyset$	3.0 mm	



LENGTH mm	QUANTITY*	THREAD mm	SHORT THREAD		FULL THREAD		
			ART.-NO.* NON-STERILE	THREAD mm	ART.-NO. STERILE	ART.-NO.* NON-STERILE	ART.-NO. STERILE
20	2	7	SC 4507-20-2	7	SC 4530-20-2S	SC 4500-20-2	SC 4500-20-2S
22	2	7	SC 4507-22-2	7	SC 4530-22-2S	SC 4500-22-2	SC 4500-22-2S
24	2	8	SC 4508-24-2	8	SC 4530-24-2S	SC 4500-24-2	SC 4500-24-2S
26	2	9	SC 4509-26-2	9	SC 4530-26-2S	SC 4500-26-2	SC 4500-26-2S
28	2	9	SC 4509-28-2	9	SC 4530-28-2S	SC 4500-28-2	SC 4500-28-2S
30	2	10	SC 4510-30-2	10	SC 4530-30-2S	SC 4500-30-2	SC 4500-30-2S
32	2	11	SC 4511-32-2	11	SC 4530-32-2S	SC 4500-32-2	SC 4500-32-2S
34	2	11	SC 4511-34-2	11	SC 4530-34-2S	SC 4500-34-2	SC 4500-34-2S
36	2	12	SC 4512-36-2	12	SC 4530-36-2S	SC 4500-36-2	SC 4500-36-2S
38	2	13	SC 4513-38-2	12	SC 4530-38-2S	SC 4500-38-2	SC 4500-38-2S
40	2	13	SC 4513-40-2	13	SC 4530-40-2S	SC 4500-40-2	SC 4500-40-2S
42	2	14	SC 4514-42-2	14	SC 4530-42-2S	SC 4500-42-2	SC 4500-42-2S
44	2	15	SC 4515-44-2	14	SC 4530-44-2S	SC 4500-44-2	SC 4500-44-2S
46	2	15	SC 4515-46-2	15	SC 4530-46-2S	SC 4500-46-2	SC 4500-46-2S
48	2	16	SC 4516-48-2	15	SC 4530-48-2S	SC 4500-48-2	SC 4500-48-2S
50	2	16	SC 4516-50-2	16	SC 4530-50-2S	SC 4500-50-2	SC 4500-50-2S
52	2	17	SC 4517-52-2	17	SC 4530-52-2S	SC 4500-52-2	SC 4500-52-2S
54	2	18	SC 4518-54-2	18	SC 4530-54-2S	SC 4500-54-2	SC 4500-54-2S
56	2	19	SC 4519-56-2	19	SC 4530-56-2S	SC 4500-56-2	SC 4500-56-2S
60	2	20	SC 4520-60-2	20	SC 4530-60-2S	SC 4500-60-2	SC 4500-60-2S
64	2	21	SC 4521-64-2	21	SC 4530-64-2S	SC 4500-64-2	SC 4500-64-2S
68	2	23	SC 4523-68-2	23	SC 4530-68-2S	SC 4500-68-2	SC 4500-68-2S
72	2	24	SC 4524-72-2	24	SC 4530-72-2S	SC 4500-72-2	SC 4500-72-2S

\* in IC 2031-10

# Cannulated Screws 4.5



## CS 4.5

- ▶ self-tapping, forward and reverse
- ▶ self-drilling
- ▶ Titanium-Alloy

LENGTH mm	6 MM THREAD ART.-NO.
20	SC 4506-20-2
22	SC 4506-22-2
24	SC 4506-24-2
26	SC 4506-26-2
28	SC 4506-28-2
30	SC 4506-30-2
32	SC 4506-32-2
34	SC 4506-34-2
36	SC 4506-36-2
38	SC 4506-38-2
40	SC 4506-40-2
42	SC 4506-42-2
44	SC 4506-44-2
46	SC 4506-46-2
48	SC 4506-48-2
50	SC 4506-50-2
52	SC 4506-52-2
54	SC 4506-54-2
56	SC 4506-56-2
60	SC 4506-60-2
64	SC 4506-64-2
68	SC 4506-68-2
72	SC 4506-72-2

Thread	Cancellous
Thread- $\emptyset$	4.5 mm
Core- $\emptyset$	2.8 mm
Stem- $\emptyset$	2.8 mm
Hole- $\emptyset$	1.75 mm
Width A/F	2.5 mm
Head- $\emptyset$	6.0 mm
K-wire- $\emptyset$	1.6 mm
Drill- $\emptyset$	3.0 mm

## Tissue protection sleeve



FOR SCREW- $\emptyset$	ART.-NO.
2.7-4.5	IS 1004-00
2.7-4.5 (long)	IS 1004-10

## Obturator

▶ cannulated



FOR SCREW- $\emptyset$	ART.-NO.
2.7/3.5/4.0	IS 1005-12
4.5	IS 1005-16
2.7/3.5/4.0 (long)	IS 1005-13
4.5 (long)	IS 1005-17

## Drill sleeve



FOR DRILL BIT- $\emptyset$ mm	FOR SCREW- $\emptyset$		ART.-NO.
2.7	2.7/3.5	gliding hole/ thread hole	IS 1006-27
3.5	3.5	gliding hole	IS 1006-35
2.5	4.0	thread hole	IS 1006-25
3.0	4.5	thread hole	IS 1006-30
4.0	4.0	gliding hole	IS 1006-40
4.5	4.5	gliding hole	IS 1006-45



# Instruments CS 2.7/3.5/4.0/4.5



## Screwdriver

- ▶ cannulated
- ▶ T-handle

FOR SCREW- $\emptyset$	WIDTH A/F mm	ART.-NO.
2.7/3.5/4.0	2.5	IS 1202-12
4.5	2.5	IS 1202-16



## Screwdriver

- ▶ cannulated
- ▶ quick coupling

FOR SCREW- $\emptyset$	WIDTH A/F mm	ART.-NO.
2.7/3.5/4.0	2.5	IS 1205-12
4.5	2.5	IS 1205-16



## Screwdriver

- ▶ cannulated
- ▶ round handle

FOR SCREW- $\emptyset$	WIDTH A/F mm	ART.-NO.
2.7/3.5/4.0	2.5	IS 1203-12
4.5	2.5	IS 1203-16

## Countersink

- ▶ cannulated
- ▶ quick coupling



FOR SCREW- $\emptyset$   
2.7-4.5

ART.-NO.  
IS 1305-16

## Parallel drill guide



ART.-NO.  
IS 1602-00

## Drill guide insert

- ▶ cannulated



FOR SCREW- $\emptyset$	ART.-NO.
2.7/3.5/4.0	IS 1602-12
4.5	IS 1602-16
2.7/3.5/4.0 (long)	IS 1603-12
4.5 (long)	IS 1603-16

# Instruments CS 2.7/3.5/4.0/4.5



## Screwdriver

- ▶ not cannulated
- ▶ round handle

	ART.-NO.
T6	IU 7810-06



## Screwdriver hexagonal for explantation

- ▶ not cannulated
- ▶ round handle

FOR SCREW- $\emptyset$	WIDTH A/F mm	ART.-NO.
2.7/3.5/4.0/4.5	2.5	IU 7841-00



## Cleaning wire

- ▶ for instruments

FOR SCREW- $\emptyset$	ART.-NO.
2.7/3.5/4.0	IS 1702-12
4.5	IS 1702-16



## Direct measuring device

LENGTH mm	ART.-NO.
150	IU 7915-02
200	IU 7920-02



LENGTH mm	ART.-NO.
150	IS 7915-03

# Instruments CS 2.7/3.5/4.0/4.5

## Drill

- ▶ quick coupling
- ▶ cannulated



FOR SCREW-Ø	DRILL-Ø mm	LENGTH mm	ART.-NO.
2.7	2.0*	105	IU 7020-05
4.0	2.5	130	IU 7025-13
2.7/3.5	2.7	130	IU 7027-13
4.5	3.0	130	IU 7030-13
3.5	3.5	130	IU 7035-13
4.0	4.0	130	IU 7040-13
4.5	4.5	130	IU 7045-13

\* Sterile packed for single use

## Drill

- ▶ cannulated
- ▶ Jacobs chuck

FOR SCREW-Ø	DRILL-Ø mm	LENGTH mm	ART.-NO.
2.7/3.5	2.7	120	IU 7327-12
3.5	3.5	120	IU 7335-12
4.0	2.5	130	IU 7325-13
4.5	3.0	140	IU 7330-14

## Handle

- ▶ quick coupling
- ▶ cannulated



	ART.-NO.
small	IU 7704-00
medium	IU 7705-00

## Kirschner wire

- ▶ with trocar point
- ▶ packs of 10 units
- ▶ single use

CrNiMo-Alloy  
Titanium-Alloy



FOR SCREW-Ø	Ø mm	LENGTH mm	STEEL ART.-NO.	TITANIUM ART.-NO.	
2.7-4.0	1.2	150	NK 0012-15	NK 0012-15-2	WITHOUT THREAD
2.7-4.0	1.2	200	NK 0012-20	-	
4.5	1.6	150	NK 1016-15	NK 1016-15-2	WITH THREAD
4.5	1.6	200	NK 1016-20	NK 1016-20-2	

### AVAILABLE ON REQUEST:

2.7-4.0	1.2	150	NK 1012-15	NK 1012-15-2	WITH THREAD
2.7-4.0	1.2	200	NK 1012-20	NK 1012-20-2	
4.5	1.6	150	NK 0016-15	NK 0016-15-2	WITHOUT THREAD
4.5	1.6	200	NK 0016-20	-	



# Cannulated Screws 5.8/6.5/7.5


## CS 5.8/6.5/7.5

• Complete Set CS 5.8.....	30
• CS 5.8, 16 mm thread.....	31
• Complete Set CS 6.5.....	32
• CS 6.5, 16 mm thread.....	33
• CS 6.5, 32 mm thread.....	34
• CS 6.5, full thread.....	35
• Complete Set CS 7.5.....	36
• CS 7.5, 16 mm/32 mm thread.....	37
• CS 7.5, 8 mm thread.....	38
• CS 7.5, full thread.....	39
• Set options CS 6.5/7.5.....	40
• Instruments.....	43



# Complete Set CS 5.8

## Complete Set CS 5.8 IC 2003-00

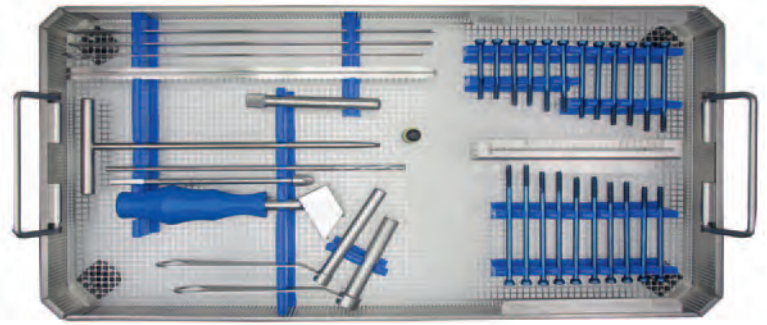

ARTICLE	ART.-NO.
Tray for instruments and implants CS 5.8, empty	IC 2003-01
Lid for trays, large	IC 2008-00

## Set of Instruments CS 5.8 IC 2003-10

ARTICLE	QUANTITY	ART.-NO.
Tray for instruments and implants CS 5.8, empty	1	IC 2003-01
Drill sleeve CS 5.8/6.5, I-ø4.5	1	IS 1010-27
Cleaning wire ø2.0, CS 5.8	1	IS 1702-20
Tissue protection sleeve CS 5.8/6.5/7.5	1	IS 2000-01
Obturator CS 5.8	1	IS 2000-22
Countersink CS 5.8, Jacobs chuck	1	IS 2310-22
Screwdriver cannulated CS 5.8 hexagonal, ø3.5, T-handle*	1	IS 2400-22
Parallel guide for K-wires CS 5.8	1	IS 2505-22
Drill CS 5.8, ø4.3, L 220, I-ø2.2, coil 54	1	IU 7343-22
Direct measuring device CS 5.8, L 270	1	IU 7927-10
K-wire with trocar point and thread, ø2.0, L 270	10	NK 1020-27



# Complete Set CS 5.8



## CS 5.8, 16 mm thread

- ▶ self-tapping, forward and reverse
- ▶ self-drilling
- ▶ Titanium-Alloy
- ◆ For ordering sterile screws please add „S“ to the article number

LENGTH mm	QUANTITY*	T I T A N I U M	
		ART.-NO.	
30	-	SC 5816-30-2	
35	-	SC 5816-35-2	
40	-	SC 5816-40-2	
45	-	SC 5816-45-2	
50	2	SC 5816-50-2	
55	2	SC 5816-55-2	
60	2	SC 5816-60-2	
65	2	SC 5816-65-2	
70	2	SC 5816-70-2	
75	2	SC 5816-75-2	
80	2	SC 5816-80-2	
85	2	SC 5816-85-2	
90	2	SC 5816-90-2	
95	2	SC 5816-95-2	
100	2	SC 5816-00-2	

Thread	Cancelous
Thread-ø	5.8 mm
Core-ø	3.7 mm
Stem-ø	4.2 mm
Hole-ø	2.2 mm
Width A/F	3.5 mm
Head-ø	8.5 mm
K-wire-ø	2.0 mm
Drill-ø	4.3 mm

\*in IC 2003-00



## Washer

- ▶ 5 pcs./package
- ▶ Titanium-Alloy
- ▶ incl. IC 0005-00 staple for washers (QTY: 1)


INNER-ø mm	OUTER-ø mm	QUANTITY*	T I T A N I U M	
			ART NO.	
6.6	13.0	5	SU 0513-00-2	

\*in IC 2003-00

- ◆ **CAUTION STERILE:**  
Washers are not yet available in sterile condition. Please order separately and add washers to the instrument tray, if you decide for sterile screws.

# Complete Set CS 6.5

## Complete Set CS 6.5 IC 2005-00

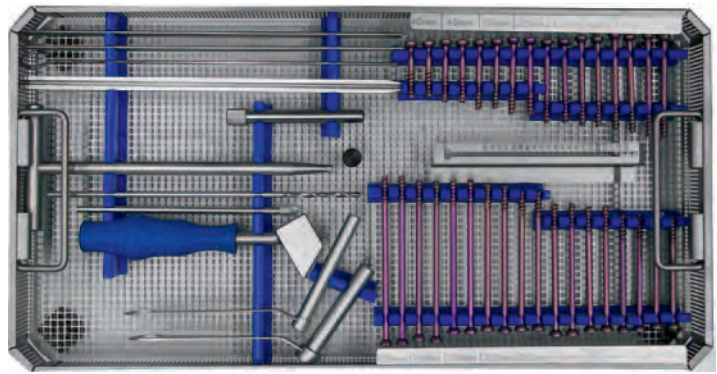

ARTICLE	ART.-NO.
Tray for instruments and implants CS 6.5, empty	IC 2005-01
Lid for trays, large	IC 2008-00

## Set of Instruments CS 6.5 IC 2005-10

ARTICLE	QUANTITY	ART.-NO.
Tray for instruments and implants CS 6.5, empty	1	IC 2005-01
Drill sleeve CS 5.8/6.5, I-ø4.5	1	IS 1010-27
Cleaning wire ø2.5, CS 6.5	1	IS 1702-25
Tissue protection sleeve CS	1	IS 2000-01
Obturator CS 6.5	1	IS 2000-27
Countersink CS 6.5/7.5, Jacobs chuck	1	IS 2310-32
Screwdriver cannulated CS 6.5/7.5 hexagonal, ø5.0, T-handle	1	IS 2400-32
Parallel guide for K-wires CS 6.5	1	IS 2505-27
Drill CS 6.5, ø4.4, L 220, I-ø2.7, coil 54	1	IU 7344-22
Direct measuring device CS 7.5/6.5, L 270	1	IU 7927-00
K-wire with trocar point and thread, ø2.5, L 270	10	NK 1025-27

# Complete Set CS 6.5



## CS 6.5, 16 mm thread

- ▶ self-tapping, forward and reverse
- ▶ self-drilling
- ▶ Titanium-Alloy

◆ For ordering sterile screws please add „S“ to the article number

LENGTH mm	QUANTITY*	TITANIUM
		ART.-NO.
35	-	SC 6516-35-2
40	2	SC 6516-40-2
45	2	SC 6516-45-2
50	2	SC 6516-50-2
55	2	SC 6516-55-2
60	2	SC 6516-60-2
65	2	SC 6516-65-2
70	2	SC 6516-70-2
75	2	SC 6516-75-2
80	2	SC 6516-80-2
85	2	SC 6516-85-2
90	2	SC 6516-90-2
95	2	SC 6516-95-2
100	2	SC 6516-00-2
105	2	SC 6516-01-2
110	2	SC 6516-02-2
115	2	SC 6516-03-2
120	2	SC 6516-04-2

Thread	6.5 mm
Thread- $\emptyset$	6.5 mm
Core- $\emptyset$	4.0 mm
Stem- $\emptyset$	4.3 mm
Hole- $\emptyset$	2.7 mm
Width A/F	5.0 mm
Head- $\emptyset$	9.5 mm
K-wire- $\emptyset$	2.5 mm
Drill- $\emptyset$	4.4 mm

\*in IC 2005-00



## Washer

- ▶ 5 pcs./package
- ▶ Titanium-Alloy
- ▶ incl. IC 0005-00 staple for washers (QTY: 1)

INNER- $\emptyset$ mm	OUTER- $\emptyset$ mm	QUANTITY*	TITANIUM
			ART.-NO.
8.6	13.0	5	SU 0913-00-2
8.6	16.0	-	SU 0916-00-2
8.6	19.0	-	SU 0919-00-2


\*in IC 2005-00

◆ **CAUTION STERILE:**  
Washers are not yet available in sterile condition. Please order separately and add washers to the instrument tray, if you decide for sterile screws.

# Cannulated Screws 6.5

## Basic Tray of Implants CS 6.5 IC 2005-05\*

- ▶ empty
- ▶ for CS 6.5, 32mm Et  
full thread

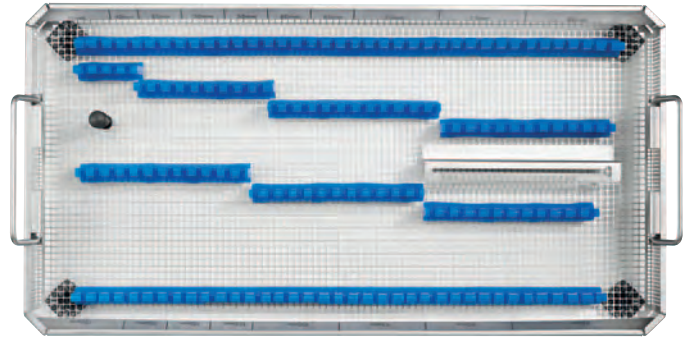

## CS 6.5, 32 mm thread

- ▶ self-tapping, forward and reverse
  - ▶ self-drilling
  - ▶ Titanium-Alloy
- ◆ For ordering sterile screws  
please add „S“ to the article  
number



Thread	Cancellous
Thread-ø	6.5 mm
Core-ø	4.0 mm
Stem-ø	4.3 mm
Hole-ø	2.7 mm
Width A/F	5.0 mm
Head-ø	9.5 mm
K-wire-ø	2.5 mm
Drill-ø	4.4 mm

### TITANIUM ART.-NO.

LENGTH mm	ART.-NO.
45	SC 6532-45-2
50	SC 6532-50-2
55	SC 6532-55-2
60	SC 6532-60-2
65	SC 6532-65-2
70	SC 6532-70-2
75	SC 6532-75-2
80	SC 6532-80-2
85	SC 6532-85-2
90	SC 6532-90-2
95	SC 6532-95-2
100	SC 6532-00-2
105	SC 6532-01-2
110	SC 6532-02-2
115	SC 6532-03-2
120	SC 6532-04-2

\*not included in IC 2005-00

# Cannulated Screws 6.5



## CS 6.5, full thread\*

- ▶ self-tapping, forward and reverse
  - ▶ self-drilling
  - ▶ Titanium-Alloy
- ◆ For ordering sterile screws please add „S“ to the article number

### TITANIUM


LENGTH mm	ART.-NO.
35	SC 6500-35-2
40	SC 6500-40-2
45	SC 6500-45-2
50	SC 6500-50-2
55	SC 6500-55-2
60	SC 6500-60-2
65	SC 6500-65-2
70	SC 6500-70-2
75	SC 6500-75-2
80	SC 6500-80-2
85	SC 6500-85-2
90	SC 6500-90-2
95	SC 6500-95-2
100	SC 6500-00-2
105	SC 6500-01-2
110	SC 6500-02-2
115	SC 6500-03-2
120	SC 6500-04-2

Thread	Cancellous
Thread- $\emptyset$	6.5 mm
Core- $\emptyset$	4.0 mm
Stem- $\emptyset$	4.3 mm
Hole- $\emptyset$	2.7 mm
Width A/F	5.0 mm
Head- $\emptyset$	9.5 mm
K-wire- $\emptyset$	2.5 mm
Drill- $\emptyset$	4.4 mm

\*not included in IC 2005-00

# Complete Set CS 7.5

## Set of Instruments CS 7.5 IC 2000-00

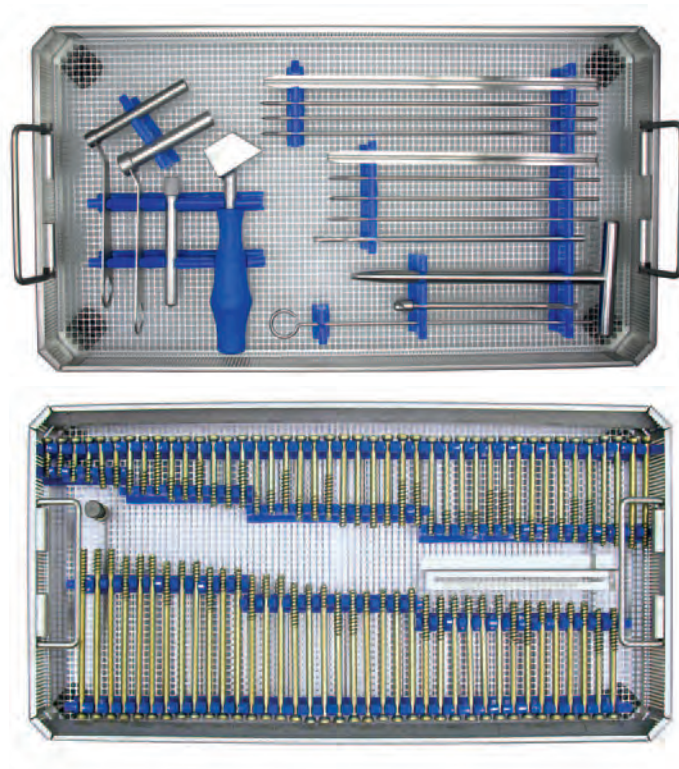

ARTICLE	ART.-NO.
Tray for instruments CS 7.5, empty	IC 2001-00
Tray for implants CS 7.5, empty	IC 2002-00
Lid for trays, large	IC 2008-00

## Set of Instruments CS 7.5 IC 2001-75

ARTICLE	QUANTITY	ART.-NO.
Tray for instruments CS 7.5, empty	1	IC 2001-00
Drill sleeve CS 7.5, I- $\emptyset$ 5.2	1	IS 1010-32
Cleaning wire $\emptyset$ 3.0, CS 7.5	1	IS 1702-30
Tissue protection sleeve CS 5.8/6.5/7.5	1	IS 2000-01
Obturator CS 7.5	1	IS 2000-32
Countersink CS 6.5/7.5, Jacobs chuck	1	IS 2310-32
Screwdriver cannulated CS 6.5/7.5 hexagonal, $\emptyset$ 5.0, T-handle*	1	IS 2400-32
Parallel guide for K-wires, CS 7.5	1	IS 2505-32
Drill CS 7.5, $\emptyset$ 5.0, L 220, I- $\emptyset$ 3.3, coil 60	1	IU 7350-22
Direct measuring device CS 7.5, L 220	1	IU 7922-00
Direct measuring device CS 6.5/7.5, L 270	1	IU 7927-00
K-wire with trocar point and thread, $\emptyset$ 3.0, L 220	6	NK 1030-22
K-wire with trocar point and thread, $\emptyset$ 3.0, L 270	6	NK 1030-27

# Complete Set CS 7.5



## Set of Implants CS 7.5 IC 2002-75

- ▶ Tray for implants, empty  
IC 2002-00

### CS 7.5, 16 mm thread

- ▶ self tapping, forward and reverse
- ▶ self drilling
- ▶ Titanium-Alloy
- ◆ For ordering sterile screws please add „S“ to the article number

LENGTH mm	QUANTITY*	TITANIUM ART.-NO.
30	2	SC 7516-30-2
35	2	SC 7516-35-2
40	2	SC 7516-40-2
45	2	SC 7516-45-2
50	2	SC 7516-50-2
55	2	SC 7516-55-2
60	2	SC 7516-60-2
65	2	SC 7516-65-2
70	4	SC 7516-70-2
75	4	SC 7516-75-2
80	4	SC 7516-80-2
85	4	SC 7516-85-2
90	4	SC 7516-90-2
95	4	SC 7516-95-2
100	4	SC 7516-00-2
105	2	SC 7516-01-2
110	2	SC 7516-02-2
115	2	SC 7516-03-2
120	2	SC 7516-04-2
125	2	SC 7516-05-2
130	2	SC 7516-06-2

\*in IC 2000-00

	Thread	Cancellous
Thread-ø	7.5 mm	7.5 mm
Core-ø	5.0 mm	5.0 mm
Stemt-ø	4.9 mm	4.9 mm
Hole-ø	3.2 mm	3.2 mm
Width A/F	5.0 mm	5.0 mm
Head-ø	9.3 mm	9.3 mm
K-wire-ø	3.0 mm	3.0 mm
Drill-ø	5.0 mm	5.0 mm

LENGTH mm	QUANTITY*	ART.-NO.
45	1	SC 7532-45-2
50	1	SC 7532-50-2
55	1	SC 7532-55-2
60	1	SC 7532-60-2
65	1	SC 7532-65-2
70	2	SC 7532-70-2
75	2	SC 7532-75-2
80	2	SC 7532-80-2
85	2	SC 7532-85-2
90	2	SC 7532-90-2
95	2	SC 7532-95-2
100	2	SC 7532-00-2
105	1	SC 7532-01-2
110	1	SC 7532-02-2
115	1	SC 7532-03-2
120	1	SC 7532-04-2
125	1	SC 7532-05-2
130	1	SC 7532-06-2

\*in IC 2000-00

### CS 7.5, 32 mm thread

- ▶ self tapping, forward and reverse
- ▶ self drilling
- ▶ Titanium-Alloy
- ◆ For ordering sterile screws please add „S“ to the article number

	Thread	Cancellous
Thread-ø	7.5 mm	7.5 mm
Core-ø	5.0 mm	5.0 mm
Stemt-ø	4.9 mm	4.9 mm
Hole-ø	3.2 mm	3.2 mm
Width A/F	5.0 mm	5.0 mm
Head-ø	9.3 mm	9.3 mm
K-wire-ø	3.0 mm	3.0 mm
Drill-ø	5.0 mm	5.0 mm

# Cannulated Screws 7.5

## CS 7.5, 8 mm thread\*

- ▶ self-tapping, forward and reverse
- ▶ self-drilling
- ▶ Titanium-Alloy



Thread	Cancellous
Thread- $\emptyset$	7.5 mm
Core- $\emptyset$	5.0 mm
Stem- $\emptyset$	4.9 mm
Hole- $\emptyset$	3.2 mm
Width A/F	5.0 mm
Head- $\emptyset$	9.3 mm
K-wire- $\emptyset$	3.0 mm
Drill- $\emptyset$	5.0 mm

LENGTH mm	TITANIUM ART.-NO.
30	SC 7508-30-2
35	SC 7508-35-2
40	SC 7508-40-2
45	SC 7508-45-2
50	SC 7508-50-2
55	SC 7508-55-2
60	SC 7508-60-2
65	SC 7508-65-2
70	SC 7508-70-2
75	SC 7508-75-2
80	SC 7508-80-2
85	SC 7508-85-2
90	SC 7508-90-2
95	SC 7508-95-2
100	SC 7508-00-2
105	SC 7508-01-2
110	SC 7508-02-2
115	SC 7508-03-2
120	SC 7508-04-2
125	SC 7508-05-2
130	SC 7508-06-2

\* not included in IC 2000-00



# Cannulated Screws 7.5



## CS 7.5, full thread\*

- ▶ self-tapping, forward and reverse
  - ▶ self-drilling
  - ▶ Titanium-Alloy
- ◆ For ordering sterile screws please add „S“ to the article number

LENGTH mm	TITANIUM ART.-NO.
30	SC 7500-30-2
35	SC 7500-35-2
40	SC 7500-40-2
45	SC 7500-45-2
50	SC 7500-50-2
55	SC 7500-55-2
60	SC 7500-60-2
65	SC 7500-65-2
70	SC 7500-70-2
75	SC 7500-75-2
80	SC 7500-80-2
85	SC 7500-85-2
90	SC 7500-90-2
95	SC 7500-95-2
100	SC 7500-00-2
105	SC 7500-01-2
110	SC 7500-02-2
115	SC 7500-03-2
120	SC 7500-04-2
125	SC 7500-05-2
130	SC 7500-06-2

Thread	Cancellous
Thread- $\emptyset$	7.5 mm
Core- $\emptyset$	5.0 mm
Stem- $\emptyset$	4.9 mm
Hole- $\emptyset$	3.2 mm
Width A/F	5.0 mm
Head- $\emptyset$	9.3 mm
K-wire- $\emptyset$	3.0 mm
Drill- $\emptyset$	5.0 mm

\* not included in IC 2000-00



INNER- $\emptyset$ mm	OUTER- $\emptyset$ mm	QUANTITY*	TITANIUM ART.-NO.
8.6	13.0	5	SU 0913-00-2
8.6	16.0	-	SU 0916-00-2
8.6	19.0	-	SU 0919-00-2

\*in IC 2000-00/IC 2002-75


## Washer

- ▶ 5 pcs./package
- ▶ Titanium-Alloy
- ▶ incl. IC 0005-00 staple for washers (QTY: 1)

◆ **CAUTION STERILE:**  
Washers are not yet available in sterile condition. Please order separately and add washers to the instrument tray, if you decide for sterile screws.

# Set Options 6.5/7.5


## Instrument Set CS 6.5/7.5 IC 2004-10

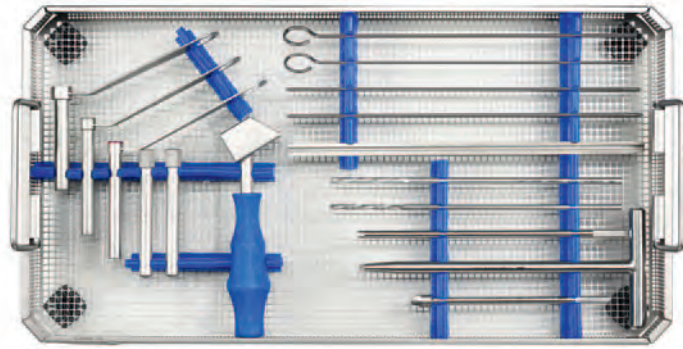

ARTICLE	ART.-NO.
Tray for instruments CS 6.5-7.5, empty	IC 2004-01
Lid for trays, large	IC 2008-00

ARTICLE	QUANTITY	ART.-NO.
Drill sleeve CS 5.8/6.5, I- $\emptyset$ 4.5	1	IS 1010-27
Drill sleeve CS 7.5, I- $\emptyset$ 5.2	1	IS 1010-32
Cleaning wire, $\emptyset$ 2.5, CS 6.5	1	IS 1702-25
Cleaning wire, $\emptyset$ 3.0, CS 7.5	1	IS 1702-30
Tissue protection sleeve CS 5.8/6.5/7.5	1	IS 2000-01
Obturator CS 6.5	1	IS 2000-27
Obturator CS 7.5	1	IS 2000-32
Countersink cannulated CS 6.5/7.5, Jacobs chuck	1	IS 2310-32
Screwdriver cannulated CS 6.5/7.5, hexagonal, $\emptyset$ 5.0, T-handle	1	IS 2400-32
Screwdriver cannulated CS 6.5/7.5, hexagonal, $\emptyset$ 5.0, Jacobs chuck	1	IS 2402-32
Parallel guide for K-wires, CS 7.5	1	IS 2505-32
Drill CS 6.5, $\emptyset$ 4.4, L 220, I- $\emptyset$ 2.7, coil 54	1	IU 7344-22
Drill CS 7.5, $\emptyset$ 5.0, L 220, I- $\emptyset$ 3.3, coil 60	1	IU 7350-22
Direct measuring device, L 270, CS 6.5/7.5	1	IU 7927-00
K-wire with trocar point and thread, $\emptyset$ 2.5, L 270	5	NK 1025-27
K-wire with trocar point and thread, $\emptyset$ 3.0, L 270	5	NK 1030-27

# Set Options 6.5/7.5

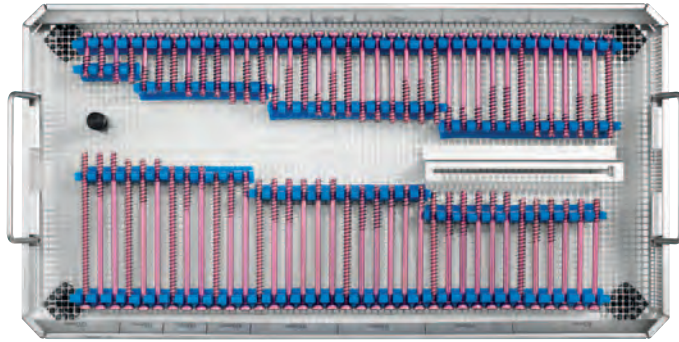

## Implantset CS 6.5 IC 2004-65

- ◆ For ordering sterile screws please add „S“ to the article number

ARTICLE	ART.-NO.
Tray for Implants CS 6.5, empty	IC 2005-05
Lid for trays, large	IC 2008-00

LENGTH mm	16 MM THREAD		32 MM THREAD		LONGTHREAD	
	QUANTITY	ART.-NO.	QUANTITY	ART.-NO.	QUANTITY	ART.-NO.
35	1	SC 6516-35-2	-	-	1	SC 6500-35-2
40	1	SC 6516-40-2	-	-	1	SC 6500-40-2
45	1	SC 6516-45-2	1	SC 6532-45-2	1	SC 6500-45-2
50	1	SC 6516-50-2	1	SC 6532-50-2	1	SC 6500-50-2
55	1	SC 6516-55-2	1	SC 6532-55-2	1	SC 6500-55-2
60	1	SC 6516-60-2	1	SC 6532-60-2	1	SC 6500-60-2
65	1	SC 6516-65-2	1	SC 6532-65-2	1	SC 6500-65-2
70	3	SC 6516-70-2	2	SC 6532-70-2	1	SC 6500-70-2
75	3	SC 6516-75-2	2	SC 6532-75-2	1	SC 6500-75-2
80	3	SC 6516-80-2	2	SC 6532-80-2	1	SC 6500-80-2
85	3	SC 6516-85-2	2	SC 6532-85-2	1	SC 6500-85-2
90	3	SC 6516-90-2	2	SC 6532-90-2	1	SC 6500-90-2
95	3	SC 6516-95-2	2	SC 6532-95-2	1	SC 6500-95-2
100	3	SC 6516-00-2	2	SC 6532-00-2	1	SC 6500-00-2
105	1	SC 6516-01-2	1	SC 6532-01-2	1	SC 6500-01-2
110	1	SC 6516-02-2	1	SC 6532-02-2	1	SC 6500-02-2
115	1	SC 6516-03-2	1	SC 6532-03-2	1	SC 6500-03-2
120	1	SC 6516-04-2	1	SC 6532-04-2	1	SC 6500-04-2



\* see page 39


### Washer\*

- ▶ 5 pcs./package
- ▶ Titanium-Alloy

# Set Options 6.5/7.5

## Implantset CS 7.5 IC 2004-75

- ◆ For ordering sterile screws please add „S“ to the article number

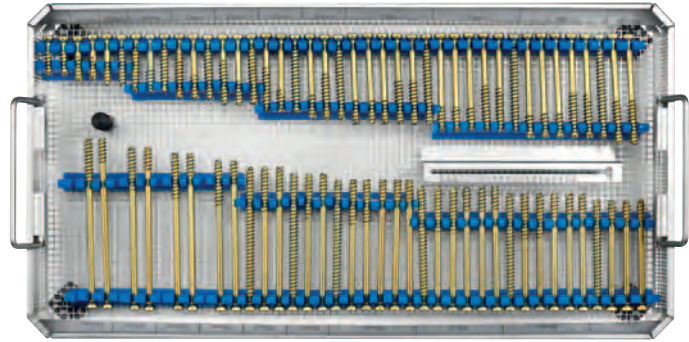

ARTICLE	ART.-NO.
Tray for implants CS 7.5, empty	IC 2002-00
Lid for trays, large	IC 2008-00

LENGTH mm	16 MM THREAD		32 MM THREAD		LONG THREAD	
	QUANTITY	ART.-NO.	QUANTITY	ART.-NO.	QUANTITY	ART.-NO.
30	1	SC 7516-30-2	-	-	-	-
35	1	SC 7516-35-2	-	-	-	-
40	1	SC 7516-40-2	-	-	1	SC 7500-40-2
45	1	SC 7516-45-2	1	SC 7532-45-2	1	SC 7500-45-2
50	1	SC 7516-50-2	1	SC 7532-50-2	1	SC 7500-50-2
55	1	SC 7516-55-2	1	SC 7532-55-2	1	SC 7500-55-2
60	1	SC 7516-60-2	1	SC 7532-60-2	1	SC 7500-60-2
65	1	SC 7516-65-2	1	SC 7532-65-2	1	SC 7500-65-2
70	3	SC 7516-70-2	2	SC 7532-70-2	1	SC 7500-70-2
75	3	SC 7516-75-2	2	SC 7532-75-2	1	SC 7500-75-2
80	3	SC 7516-80-2	2	SC 7532-80-2	1	SC 7500-80-2
85	3	SC 7516-85-2	2	SC 7532-85-2	1	SC 7500-85-2
90	3	SC 7516-90-2	2	SC 7532-90-2	1	SC 7500-90-2
95	3	SC 7516-95-2	2	SC 7532-95-2	1	SC 7500-95-2
100	3	SC 7516-00-2	2	SC 7532-00-2	1	SC 7500-00-2
105	1	SC 7516-01-2	1	SC 7532-01-2	1	SC 7500-01-2
110	1	SC 7516-02-2	1	SC 7532-02-2	1	SC 7500-02-2
115	1	SC 7516-03-2	1	SC 7532-03-2	-	-
120	1	SC 7516-04-2	1	SC 7532-04-2	-	-
125	1	SC 7516-05-2	1	SC 7532-05-2	-	-
130	1	SC 7516-06-2	1	SC 7532-06-2	-	-

### Washer\*

- ▶ 5 pcs./package
- ▶ Titanium-Alloy



\* see page 39

# Instruments CS 5.8/6.5/7.5

## Screwdriver

- ▶ cannulated
- ▶ round handle



FOR SCREW- $\emptyset$	WIDTH A/F mm	ART.-NO.
5.8	3.5	IS 2401-22
6.5/7.5	5.0	IS 2401-32



- ▶ cannulated
- ▶ T-handle

FOR SCREW- $\emptyset$	WIDTH A/F mm	ART.-NO.
5.8	3.5	IS 2400-22
6.5/7.5	5.0	IS 2400-32



- ▶ cannulated
- ▶ Jacobs chuck

FOR SCREW- $\emptyset$	WIDTH A/F mm	ART.-NO.
6.5/7.5	5.0	IS 2402-32
5.8	3.5	IS 2404-22

## Screwdriver hexagonal for explantation

- ▶ not cannulated
- ▶ round handle



FOR SCREW- $\emptyset$	WIDTH A/F mm	ART.-NO.
5.8/6.5/7.5	3.5	IU 7865-00

# Instruments CS 5.8/6.5/7.5

## Drill sleeve



SCREW- $\emptyset$	ART.-NO.
5.8/6.5	IS 1010-27
7.5	IS 1010-32

## Drill

- ▶ for Jacobs chuck
- ▶ cannulated



SCREW- $\emptyset$	$\emptyset$ mm	LENGTH mm	ART NO.
5.8	4.3	220	IU 7343-22
6.5	4.4	220	IU 7344-22
7.5	5.0	220	IU 7350-22

## Direct measuring device



SCREW- $\emptyset$	Length mm	ART.-NO.
5.8	270	IU 7927-10
6.5/7.5	270	IU 7927-00
7.5	220	IU 7922-00



SCREW- $\emptyset$	Length mm	ART.-NO.
6.5/7.5	270	IS 7927-01

## Tissue protection sleeve



ART.-NO.  
IS 2000-01

## Cleaning wire

▶ for Instruments



SCREW- $\emptyset$	ART.-NO.
5.8	IS 1702-20
6.5	IS 1702-25
7.5	IS 1702-30

## Kirschner wire

- ▶ with trocar point
- ▶ with thread
- ▶ packs of 10 units
- ▶ single use

CrNiMo-Alloy  
Titan-Alloy



	SCREW- $\emptyset$	$\emptyset$ mm	LENGTH mm	STEEL	TITANIUM
				ART.-NO.	ART.-NO.
WITH THREAD	5.8	2.0	270	NK 1020-27	-
	6.5	2.5	270	NK 1025-27	-
	7.5	3.0	220	NK 1030-22	NK 1030-22-2
	7.5	3.0	270	NK 1030-27	NK 1030-27-2

## Obturator

- ▶ cannulated



SCREW-Ø	ART.-NO.
5.8	IS 2000-22
6.5	IS 2000-27
7.5	IS 2000-32

## Countersink

- ▶ cannulated
- ▶ Jacobs Chuck



SCREW-Ø	ART.-NO.
5.8	IS 2310-22
6.5/7.5	IS 2310-32

## Parallel guide for Kirschner wires

for parallel insert  
of the Kirschner wires



SCREW-Ø	ART.-NO.
5.8	IS 2505-22
6.5	IS 2505-27
7.5	IS 2505-32



# Index Alphabetical

ARTICLE	ART.-NO.	PAGE
Basic tray for 2 or 4 screw racks CS 2.7-4.5, empty	IC 2073-xx	16
Basic tray for implants CS 6.5, empty	IC 2005-05	34
Basic tray for implants CS 7.5, empty	IC 2002-00	36, 42
Basic tray for instruments and implants CS 5.8, empty	IC 2003-01	30
Basic tray for instruments and implants CS 6.5, empty	IC 2005-01	32
Basic tray for instruments CS 2.0/2.7, empty	IC 2075-01	8
Basic tray for instruments CS 2.7-4.5	IC 2071-10	14
Basic tray for instruments CS 2.7-4.5, small	IC 2072-16	15
Basic tray for instruments CS 6.5/7.5	IC 2004-01	40
Basic tray for instruments CS 7.5, empty	IC 2001-00	36
Cannulated screw (CS) $\varnothing$ 2.7, long thread, Titanium	SC 2706-...	17
Cannulated screw (CS) $\varnothing$ 2.7, short thread, Titanium	SC 2704-...	17
Cannulated screw (CS) $\varnothing$ 3.5, full thread, Titanium	SC 3500-...	18
Cannulated screw (CS) $\varnothing$ 3.5, short thread, Titanium	SC 3504-...	18
Cannulated screw (CS) $\varnothing$ 4.0, full thread, Titanium	SC 4000-...	19
Cannulated screw (CS) $\varnothing$ 4.0, short thread, Titanium	SC 4005-...	19
Cannulated screw (CS) $\varnothing$ 4.5, 6mm thread, Titanium	SC 4506-...	21
Cannulated screw (CS) $\varnothing$ 4.5, full thread, Titanium	SC 4500-...	20
Cannulated screw (CS) $\varnothing$ 4.5, short thread, Titanium	SC 4507-...	20
Cannulated screw (CS) $\varnothing$ 5.8, 16mm thread, Titanium	SC 5816-...	31
Cannulated screw (CS) $\varnothing$ 6.5, 16mm thread, Titanium	SC 6516-...	33, 41
Cannulated screw (CS) $\varnothing$ 6.5, 32mm thread, Titanium	SC 6532-...	34, 41
Cannulated screw (CS) $\varnothing$ 6.5, full thread, Titanium	SC 6500-...	35, 41
Cannulated screw (CS) $\varnothing$ 7.5, 16mm thread, Titanium	SC 7516-...	37, 42
Cannulated screw (CS) $\varnothing$ 7.5, 32mm thread, Titanium	SC 7532-...	37, 42
Cannulated screw (CS) $\varnothing$ 7.5, 8mm thread, Titanium	SC 7508-...	38
Cannulated screw (CS) $\varnothing$ 7.5, full thread, Titanium	SC 7500-...	39, 42
Cleaning wire $\varnothing$ 0.8, CS 2.0	IS 1702-08	8
Cleaning wire $\varnothing$ 1.2, CS 2.7-4.0	IS 1702-12	8, 9, 14, 15, 25
Cleaning wire $\varnothing$ 1.6, CS 4.5	IS 1702-16	14, 15, 25
Cleaning wire $\varnothing$ 2.0, CS 5.8	IS 1702-20	30, 45
Cleaning wire $\varnothing$ 2.5, CS 6.5	IS 1702-25	32, 40, 45
Cleaning wire $\varnothing$ 3.0, CS 7.5	IS 1702-30	36, 40, 45
Complete set CS 2.0/2.7	IC 2075-00	8
Complete set CS 2.0/2.7/3.5	IC 2072-20	16
Complete set CS 2.7-4.0	IC 2072-30	16
Complete set CS 2.7/3.5/4.5	IC 2072-35	16
Complete set CS 5.8	IC 2003-00	30
Complete set CS 6.5	IC 2005-00	32
Complete set CS 7.5	IC 2000-00	36
Countersink CS 2.0, quick coupling	IS 1305-08	8, 9, 24
Countersink CS 2.7-4.5, quick coupling	IS 1305-16	8, 9, 14, 15
Countersink CS 5.8, Jacobs chuck	IS 2310-22	30, 46
Countersink CS 6.5/7.5, Jacobs chuck	IS 2310-32	32, 36, 40, 46
Direct measuring device CS 2.0, L 100, closed	IS 7910-00	8, 9
Direct measuring device CS 2.7-4.5, L 150	IU 7915-02	14, 15, 25
Direct measuring device CS 2.7-4.5, L 150, closed	IS 7915-03	25
Direct measuring device CS 4.5, L 200, long	IU 7920-02	25
Direct measuring device CS 5.8, L 270	IU 7927-10	30, 44
Direct measuring device CS 6.5/7.5, L 270	IU 7927-00	32, 36, 40, 44
Direct measuring device CS 6.5/7.5, L 270, closed	IS 7927-01	44
Direct measuring device CS 7.5, L 220	IU 7922-00	36, 44
Drill CS 2.0, $\varnothing$ 1.7, L 85, quick coupling, sterile, single use	IU 7017-05	8, 9
Drill CS 2.7, $\varnothing$ 2.0, L 105, quick coupling, sterile, single use	IU 7020-05	8, 9

# Index Alphabetical

ARTICLE	ART.-NO.	PAGE
Drill CS 2.7/3.5, ø2.7, L 130, quick coupling	IU 7027-13	14, 15, 26
Drill CS 3.5, ø2.7, L 120, I-ø1.4, coil 30	IU 7327-12	26
Drill CS 3.5, ø3.5, L 120, I-ø1.4, coil 40	IU 7335-12	26
Drill CS 3.5, ø3.5, L 130, quick coupling	IU 7035-13	14, 15, 26
Drill CS 4.0, ø2.5, L 130, I-ø1.4, coil 30	IU 7325-13	26
Drill CS 4.0, ø2.5, L 130, quick coupling	IU 7025-13	14, 15, 26
Drill CS 4.0, ø4.0, L 130, quick coupling	IU 7040-13	14, 15, 26
Drill CS 4.5, ø3.0, L 130, quick coupling	IU 7030-13	14, 15, 26
Drill CS 4.5, ø3.0, L 140, I-ø1.8, coil 30	IU 7330-14	26
Drill CS 4.5, ø4.5, L 130, quick coupling	IU 7045-13	14, 15, 26
Drill CS 5.8, ø4.3, L 220, I-ø2.2, coil 54	IU 7343-22	30, 44
Drill CS 6.5, ø4.4, L 220, I-ø2.7, coil 54	IU 7344-22	32, 40, 44
Drill CS 7.5, ø5.0, L 220, I-ø3.3, coil 60	IU 7350-22	36, 40, 44
Drill guide insert CS 2.7-4.0	IS 1602-12	14, 15, 24
Drill guide insert CS 2.7-4.0, long	IS 1603-12	24
Drill guide insert CS 4.5	IS 1602-16	14, 15, 24
Drill guide insert CS 4.5 long	IS 1603-16	24
Drill sleeve CS 2.0, drill ø1.7, with wire guide	IS 1006-17	8, 9
Drill sleeve CS 2.7, drill ø2.0, with wire guide	IS 1006-20	8, 9
Drill sleeve CS 3.5, I-ø2.8	IS 1006-27	14, 15, 22
Drill sleeve CS 3.5, I-ø3.6	IS 1006-35	14, 15, 22
Drill sleeve CS 4.0, I-ø2.6	IS 1006-25	14, 15, 22
Drill sleeve CS 4.0, I-ø4.1	IS 1006-40	14, 15, 22
Drill sleeve CS 4.5, I-ø3.1	IS 1006-30	14, 15, 22
Drill sleeve CS 4.5, I-ø4.6	IS 1006-45	14, 15, 22
Drill sleeve CS 5.8/6.5, I-ø4.5	IS 1010-27	30, 32, 40, 44
Drill sleeve CS 7.5, I-ø5.2	IS 1010-32	36, 40, 44
Handle for quick coupling, medium, cannulated	IU 7705-00	26
Insert for instruments, empty (add to IC 2072-16)	IC 2072-17	15
Instrument set CS 3.5	IC 2075-35	16
Instrument set CS 4.0	IC 2075-40	16
Instrument set CS 4.5	IC 2075-45	16
Instrument set CS 6.5/7.5	IC 2004-10	40
K-wire with trocar point and thread ø1.6, L 200, CS 4.5	NK 1016-20	27
K-wire with trocar point and thread ø1.6, L 200, CS 4.5, Titanium	NK 1016-20-2	27
K-wire with trocar point and thread, ø1.2, L 150, CS 2.7/3.5/4.0	NK 1012-15	27
K-wire with trocar point and thread, ø1.2, L 150, CS 2.7/3.5/4.0, Titanium	NK 1012-15-2	27
K-wire with trocar point and thread, ø1.2, L 200, CS 2.7-4.0	NK 1012-20	27
K-wire with trocar point and thread, ø1.2, L 200, CS 2.7-4.0, Titanium	NK 1012-20-2	27
K-wire with trocar point and thread, ø1.6, L 150, CS 4.5	NK 1016-15	14, 15, 27
K-wire with trocar point and thread, ø1.6, L 150, CS 4.5, Titanium	NK 1016-15-2	27
K-wire with trocar point and thread, ø2.0, L 270, CS 5.8	NK 1020-27	30, 45
K-wire with trocar point and thread, ø2.5, L 270, CS 6.5	NK 1025-27	32, 40, 45
K-wire with trocar point and thread, ø3.0, L 220, CS 7.5	NK 1030-22	36, 45
K-wire with trocar point and thread, ø3.0, L 220, CS 7.5, Titanium	NK 1030-22-2	45
K-wire with trocar point and thread, ø3.0, L 270, CS 7.5	NK 1030-27	36, 40, 45
K-wire with trocar point and thread, ø3.0, L 270, CS 7.5, Titanium	NK 1030-27-2	45
K-wire with trocar point ø0.8, L 100	NK 0008-10	8, 9
K-wire with trocar point ø1.2, L 100	NK 0012-10	8, 9
K-wire with trocar point, ø1.2, L 150, CS 2.7-4.0	NK 0012-15	14, 15, 27
K-wire with trocar point, ø1.2, L 150, CS 2.7-4.0, Titanium	NK 0012-15-2	27
K-wire with trocar point, ø1.2, L 200, CS 2.7-4.0	NK 0012-20	27
K-wire with trocar point, ø1.6, L 150, CS 4.5	NK 0016-15	27
K-wire with trocar point, ø1.6, L 150, CS 4.5, Titanium	NK 0016-15-2	27
K-wire with trocar point, ø1.6, L 200, CS 4.5	NK 0016-20	27

# Index Alphabetical

ARTICLE	ART.-NO.	PAGE
Lid for trays, large	IC 2008-00	14, 30, 32, 34, 40, 42
Lid for trays, small	IC 2007-00	8, 15, 16
Obturator CS 2.7-4.0	IS 1005-12	14, 15, 22
Obturator CS 4.5	IS 1005-16	14, 15, 22
Obturator CS 4.5, long	IS 1005-17	22
Obturator CS 5.8	IS 2000-22	30, 46
Obturator CS 6.5	IS 2000-27	32, 40, 46
Obturator CS 7.5	IS 2000-32	36, 40, 46
Obturator, long, CS 2.7-4.0, long	IS 1005-13	22
Parallel drill guide CS 2.7-4.5, basic device	IS 1602-00	14, 15, 24
Parallel guide for K-wires CS 5.8	IS 2505-22	30, 46
Parallel guide for K-wires CS 6.5	IS 2505-27	32, 46
Parallel guide for K-wires CS 7.5	IS 2505-32	36, 40, 46
Screw rack for CS 2.0/2.7, empty	IC 2051-00	8
Screw rack for CS 2.7, empty	IC 2041-11	17
Screw rack for CS 3.5, empty	IC 2011-11	18
Screw rack for CS 4.0, empty	IC 2021-11	19
Screw rack for CS 4.5, empty	IC 2031-11	20
Screwdriver cannulated CS 2.0, T6, quick coupling	IS 1205-08	8, 9
Screwdriver cannulated CS 2.7-4.0, hex 2.5, quick coupling	IS 1205-12	8, 9, 14, 15, 23
Screwdriver cannulated CS 2.7-4.0, hexagonal, ø2.5, round handle	IS 1203-12	14, 15, 23
Screwdriver cannulated CS 2.7-4.0, hexagonal, ø2.5, T-handle	IS 1202-12	23
Screwdriver cannulated CS 4.5, hex 2.5, quick coupling	IS 1205-16	14, 15, 23
Screwdriver cannulated CS 4.5, hexagonal, ø2.5, round handle	IS 1203-16	14, 15, 23
Screwdriver cannulated CS 4.5, hexagonal, ø2.5, T-handle	IS 1202-16	23
Screwdriver cannulated CS 5.8, hexagonal, ø3.5, Jacobs chuck	IS 2404-22	43
Screwdriver cannulated CS 5.8, hexagonal, ø3.5, round handle	IS 2401-22	43
Screwdriver cannulated CS 5.8, hexagonal, ø3.5, T-handle	IS 2400-22	30, 43
Screwdriver cannulated CS 6.5/7.5, hexagonal, ø5.0, Jacobs chuck	IS 2402-32	40, 43
Screwdriver cannulated CS 6.5/7.5, hexagonal, ø5.0, round handle	IS 2401-32	43
Screwdriver cannulated CS 6.5/7.5, hexagonal, ø5.0, T-handle	IS 2400-32	32, 40, 43
Screwdriver, hexagonal ø2.5, blue handle (for explantation)	IU 7841-00	25
Screwdriver, hexagonal ø3.5	IU 7865-00	43
Screwdriver T6, blue, quick coupling	IU 7810-06	25
Set of implants CS 6.5 (extended)	IC 2004-65	41
Set of implants CS 7.5	IC 2002-75	37
Set of implants CS 7.5 (extended)	IC 2004-75	42
Set of instruments CS 2.7-4.5	IC 2072-10	15
Set of instruments CS 2.7-4.5, small tray	IC 2072-15	15
Set of instruments CS 5.8	IC 2003-10	30
Set of instruments CS 6.5	IC 2005-10	32
Set of instruments CS 7.5	IC 2001-75	36
Small cannulated handle, quick coupling	IU 7704-00	8, 9, 14, 15, 26
Staple for washers	IC 0005-00	8, 14
Tissue protection sleeve CS 2.7-4.5	IS 1004-00	14, 15, 22
Tissue protection sleeve CS 5.8-7.5	IS 2000-01	30, 32, 36, 40, 45
Tissue protection sleeve, CS 2.7-4.5, long	IS 1004-10	22
Washer CS 2.0/2.7, Titanium	SU 0205-00-2	11
Washer CS 2.7/3.5, Titanium	SU 0407-00-2	14, 15
Washer CS 4.0/4.5, Titanium	SU 0508-00-2	14, 15
Washer CS 5.8, Titanium	SU 0513-00-2	31
Washer CS 6.5/7.5, Titanium	SU 0913-00-2	33, 39
Washer CS 7.5, Titanium	SU 0916-00-2	33, 39
Washer CS 7.5, Titanium	SU 0919-00-2	33, 39

# Index Article Numbers

ART.-NO.	ARTICLE	PAGE
IC 0005-00	Staple for washers	8, 14
IC 2000-00	Complete set CS 7.5	36
IC 2001-00	Basic tray for instruments CS 7.5, empty	36
IC 2001-75	Set of instruments CS 7.5	36
IC 2002-00	Basic tray for implants CS 7.5, empty	36, 42
IC 2002-75	Set of implants CS 7.5	37
IC 2003-00	Complete set CS 5.8	30
IC 2003-01	Basic tray for instruments and implants CS 5.8, empty	30
IC 2003-10	Set of instruments CS 5.8	30
IC 2004-01	Basic tray for instruments CS 6.5/7.5	40
IC 2004-10	Instrument set CS 6.5/7.5	40
IC 2004-65	Set of implants CS 6.5 (extended)	41
IC 2004-75	Set of implants CS 7.5 (extended)	42
IC 2005-00	Complete set CS 6.5	32
IC 2005-01	Basic tray for instruments and implants CS 6.5, empty	32
IC 2005-05	Basic tray for implants CS 6.5, empty	34
IC 2005-10	Set of instruments CS 6.5	32
IC 2007-00	Lid for trays, small	8, 15, 16
IC 2008-00	Lid for trays, large	14, 30, 32, 34, 40, 42
IC 2011-11	Screw rack for CS 3.5, empty	18
IC 2021-11	Screw rack for CS 4.0, empty	19
IC 2031-11	Screw rack for CS 4.5, empty	20
IC 2041-11	Screw rack for CS 2.7, empty	17
IC 2051-00	Screw rack for CS 2.0/2.7, empty	8
IC 2071-10	Basic tray for instruments CS 2.7-4.5	14
IC 2072-10	Set of instruments CS 2.7-4.5	15
IC 2072-15	Set of instruments CS 2.7-4.5, small tray	15
IC 2072-16	Basic tray for instruments CS 2.7-4.5, small	15
IC 2072-17	Insert for instruments, empty (add to IC 2072-16)	15
IC 2072-20	Complete set CS 2.0/2.7/3.5	16
IC 2072-30	Complete set CS 2.7-4.0	16
IC 2072-35	Complete set CS 2.7/3.5/4.5	16
IC 2073-xx	Basic tray for 2 or 4 screw racks CS 2.7-4.5, empty	16
IC 2075-00	Complete set CS 2.0/2.7	8
IC 2075-01	Basic tray for instruments CS 2.0/2.7, empty	8
IC 2075-35	Instrument set CS 3.5	16
IC 2075-40	Instrument set CS 4.0	16
IC 2075-45	Instrument set CS 4.5	16
IS 1004-00	Tissue protection sleeve CS 2.7-4.5	14, 15, 22
IS 1004-10	Tissue protection sleeve, CS 2.7-4.5, long	22
IS 1005-12	Obturator CS 2.7-4.0	14, 15, 22
IS 1005-13	Obturator, long, CS 2.7-4.0, long	22
IS 1005-16	Obturator CS 4.5	14, 15, 22
IS 1005-17	Obturator CS 4.5, long	22
IS 1006-17	Drill sleeve CS 2.0, drill $\varnothing$ 1.7, with wire guide	8, 9
IS 1006-20	Drill sleeve CS 2.7, drill $\varnothing$ 2.0, with wire guide	8, 9
IS 1006-25	Drill sleeve CS 4.0, l- $\varnothing$ 2.6	14, 15, 22
IS 1006-27	Drill sleeve CS 3.5, l- $\varnothing$ 2.8	14, 15, 22
IS 1006-30	Drill sleeve CS 4.5, l- $\varnothing$ 3.1	14, 15, 22
IS 1006-35	Drill sleeve CS 3.5, l- $\varnothing$ 3.6	14, 15, 22
IS 1006-40	Drill sleeve CS 4.0, l- $\varnothing$ 4.1	14, 15, 22
IS 1006-45	Drill sleeve CS 4.5, l- $\varnothing$ 4.6	14, 15, 22
IS 1010-27	Drill sleeve CS 5.8/6.5, l- $\varnothing$ 4.5	30, 32, 40, 44
IS 1010-32	Drill sleeve CS 7.5, l- $\varnothing$ 5.2	36, 40, 44

# Index Article Numbers

ART.-NO.	ARTICLE	PAGE
IS 1202-12	Screwdriver cannulated CS 2.7-4.0, hexagonal, ø2.5, T-handle	23
IS 1202-16	Screwdriver cannulated CS 4.5, hexagonal, ø2.5, T-handle	23
IS 1203-12	Screwdriver cannulated CS 2.7-4.0, hexagonal, ø2.5, round handle	14, 15, 23
IS 1203-16	Screwdriver cannulated CS 4.5, hexagonal, ø2.5, round handle	14, 15, 23
IS 1205-08	Screwdriver cannulated CS 2.0, T6, quick coupling	8, 9
IS 1205-12	Screwdriver cannulated CS 2.7-4.0, hex 2.5, quick coupling	8, 9, 14, 15, 23
IS 1205-16	Screwdriver cannulated CS 4.5, hex 2.5, quick coupling	14, 15, 23
IS 1305-08	Countersink CS 2.0, quick coupling	8, 9, 24
IS 1305-16	Countersink CS 2.7-4.5, quick coupling	8, 9, 14, 15
IS 1602-00	Parallel drill guide CS 2.7-4.5, basic device	14, 15, 24
IS 1602-12	Drill guide insert CS 2.7-4.0	14, 15, 24
IS 1602-16	Drill guide insert CS 4.5	14, 15, 24
IS 1603-12	Drill guide insert CS 2.7-4.0, long	24
IS 1603-16	Drill guide insert CS 4.5 long	24
IS 1702-08	Cleaning wire ø0.8, CS 2.0	8
IS 1702-12	Cleaning wire ø1.2, CS 2.7-4.0	8, 9, 14, 15, 25
IS 1702-16	Cleaning wire ø1.6, CS 4.5	14, 15, 25
IS 1702-20	Cleaning wire ø2.0, CS 5.8	30, 45
IS 1702-25	Cleaning wire ø2.5, CS 6.5	32, 40, 45
IS 1702-30	Cleaning wire ø3.0, CS 7.5	36, 40, 45
IS 2000-01	Tissue protection sleeve CS 5.8-7.5	30, 32, 36, 40, 45
IS 2000-22	Obturator CS 5.8	30, 46
IS 2000-27	Obturator CS 6.5	32, 40, 46
IS 2000-32	Obturator CS 7.5	36, 40, 46
IS 2310-22	Countersink CS 5.8, Jacobs chuck	30, 46
IS 2310-32	Countersink CS 6.5/7.5, Jacobs chuck	32, 36, 40, 46
IS 2400-22	Screwdriver cannulated CS 5.8, hexagonal, ø3.5, T-handle	30, 43
IS 2400-32	Screwdriver cannulated CS 6.5/7.5, hexagonal, ø5.0, T-handle	32, 40, 43
IS 2401-22	Screwdriver cannulated CS 5.8, hexagonal, ø3.5, round handle	43
IS 2401-32	Screwdriver cannulated CS 6.5/7.5, hexagonal, ø5.0, round handle	43
IS 2402-32	Screwdriver cannulated CS 6.5/7.5, hexagonal, ø5.0, Jacobs chuck	40, 43
IS 2404-22	Screwdriver cannulated CS 5.8, hexagonal, ø3.5, Jacobs chuck	43
IS 2505-22	Parallel guide for K-wires CS 5.8	30, 46
IS 2505-27	Parallel guide for K-wires CS 6.5	32, 46
IS 2505-32	Parallel guide for K-wires CS 7.5	36, 40, 46
IS 7910-00	Direct measuring device CS 2.0, L 100, closed	8, 9
IS 7915-03	Direct measuring device CS 2.7-4.5, L 150, closed	25
IS 7927-01	Direct measuring device CS 6.5/7.5, L 270, closed	44
IU 7017-05	Drill CS 2.0, ø1.7, L 85, quick coupling, sterile, single use	8, 9
IU 7020-05	Drill CS 2.7, ø2.0, L 105, quick coupling, sterile, single use	8, 9
IU 7025-13	Drill CS 4.0, ø2.5, L 130, quick coupling	14, 15, 26
IU 7027-13	Drill CS 2.7/3.5, ø2.7, L 130, quick coupling	14, 15, 26
IU 7030-13	Drill CS 4.5, ø3.0, L 130, quick coupling	14, 15, 26
IU 7035-13	Drill CS 3.5, ø3.5, L 130, quick coupling	14, 15, 26
IU 7040-13	Drill CS 4.0, ø4.0, L 130, quick coupling	14, 15, 26
IU 7045-13	Drill CS 4.5, ø4.5, L 130, quick coupling	14, 15, 26
IU 7325-13	Drill CS 4.0, ø2.5, L 130, I-ø1.4, coil 30	26
IU 7327-12	Drill CS 3.5, ø2.7, L 120, I-ø1.4, coil 30	26
IU 7330-14	Drill CS 4.5, ø3.0, L 140, I-ø1.8, coil 30	26
IU 7335-12	Drill CS 3.5, ø3.5, L 120, I-ø1.4, coil 40	26
IU 7343-22	Drill CS 5.8, ø4.3, L 220, I-ø2.2, coil 54	30, 44
IU 7344-22	Drill CS 6.5, ø4.4, L 220, I-ø2.7, coil 54	32, 40, 44
IU 7350-22	Drill CS 7.5, ø5.0, L 220, I-ø3.3, coil 60	36, 40, 44

## Index Article Numbers

ART.-NO.	ARTICLE	PAGE
IU 7704-00	Small cannulated handle, quick coupling	8, 9, 14, 15, 26
IU 7705-00	Handle for quick coupling, medium, cannulated	26
IU 7810-06	Screwdriver T6, blue, quick coupling	25
IU 7841-00	Screwdriver, hexagonal ø2.5, blue handle (for explanation)	25
IU 7865-00	Screwdriver, hexagonal ø3.5	43
IU 7915-02	Direct measuring device CS 2.7-4.5, L 150	14, 15, 25
IU 7920-02	Direct measuring device CS 4.5, L 200, long	25
IU 7922-00	Direct measuring device CS 7.5, L 220	36, 44
IU 7927-00	Direct measuring device CS 6.5/7.5, L 270	32, 36, 40, 44
IU 7927-10	Direct measuring device CS 5.8, L 270	30, 44
NK 0008-10	K-wire with trocar point ø0.8, L 100	8, 9
NK 0012-10	K-wire with trocar point ø1.2, L 100	8, 9
NK 0012-15	K-wire with trocar point, ø1.2, L 150, CS 2.7-4.0	14, 15, 27
NK 0012-15-2	K-wire with trocar point, ø1.2, L 150, CS 2.7-4.0, Titanium	27
NK 0012-20	K-wire with trocar point, ø1.2, L 200, CS 2.7-4.0	27
NK 0016-15	K-wire with trocar point, ø1.6, L 150, CS 4.5	27
NK 0016-15-2	K-wire with trocar point, ø1.6, L 150, CS 4.5, Titanium	27
NK 0016-20	K-wire with trocar point, ø1.6, L 200, CS 4.5	27
NK 1012-15	K-wire with trocar point and thread, ø1.2, L 150, CS 2.7/3.5/4.0	27
NK 1012-15-2	K-wire with trocar point and thread, ø1.2, L 150, CS 2.7/3.5/4.0, Titanium	27
NK 1012-20	K-wire with trocar point and thread, ø1.2, L 200, CS 2.7-4.0	27
NK 1012-20-2	K-wire with trocar point and thread, ø1.2, L 200, CS 2.7-4.0, Titanium	27
NK 1016-15	K-wire with trocar point and thread, ø1.6, L 150, CS 4.5	14, 15, 27
NK 1016-15-2	K-wire with trocar point and thread, ø1.6, L 150, CS 4.5, Titanium	27
NK 1016-20	K-wire with trocar point and thread ø1.6, L 200, CS 4.5	27
NK 1016-20-2	K-wire with trocar point and thread ø1.6, L 200, CS 4.5, Titanium	27
NK 1020-27	K-wire with trocar point and thread, ø2.0, L 270, CS 5.8	30, 45
NK 1025-27	K-wire with trocar point and thread, ø2.5, L 270, CS 6.5	32, 40, 45
NK 1030-22	K-wire with trocar point and thread, ø3.0, L 220, CS 7.5	36, 45
NK 1030-22-2	K-wire with trocar point and thread, ø3.0, L 220, CS 7.5, Titanium	45
NK 1030-27	K-wire with trocar point and thread, ø3.0, L 270, CS 7.5	36, 40, 45
NK 1030-27-2	K-wire with trocar point and thread, ø3.0, L 270, CS 7.5, Titanium	45
SC 2704-...	Cannulated screw (CS) ø2.7, short thread, Titanium	17
SC 2706-...	Cannulated screw (CS) ø2.7, long thread, Titanium	17
SC 3500-...	Cannulated screw (CS) ø3.5, full thread, Titanium	18
SC 3504-...	Cannulated screw (CS) ø3.5, short thread, Titanium	18
SC 4000-...	Cannulated screw (CS) ø4.0, full thread, Titanium	19
SC 4005-...	Cannulated screw (CS) ø4.0, short thread, Titanium	19
SC 4500-...	Cannulated screw (CS) ø4.5, full thread, Titanium	20
SC 4506-...	Cannulated screw (CS) ø4.5, 6mm thread, Titanium	21
SC 4507-...	Cannulated screw (CS) ø4.5, short thread, Titanium	20
SC 5816-...	Cannulated screw (CS) ø5.8, 16mm thread, Titanium	31
SC 6500-...	Cannulated screw (CS) ø6.5, full thread, Titanium	35, 41
SC 6516-...	Cannulated screw (CS) ø6.5, 16mm thread, Titanium	33, 41
SC 6532-...	Cannulated screw (CS) ø6.5, 32mm thread, Titanium	34, 41
SC 7500-...	Cannulated screw (CS) ø7.5, full thread, Titanium	39, 42
SC 7508-...	Cannulated screw (CS) ø7.5, 8mm thread, Titanium	38
SC 7516-...	Cannulated screw (CS) ø7.5, 16mm thread, Titanium	37, 42
SC 7532-...	Cannulated screw (CS) ø7.5, 32mm thread, Titanium	37, 42
SU 0205-00-2	Washer CS 2.0/2.7, Titanium	11
SU 0407-00-2	Washer CS 2.7/3.5, Titanium	14, 15
SU 0508-00-2	Washer CS 4.0/4.5, Titanium	14, 15
SU 0513-00-2	Washer CS 5.8, Titanium	31
SU 0913-00-2	Washer CS 6.5/7.5, Titanium	33, 39
SU 0916-00-2	Washer CS 7.5, Titanium	33, 39
SU 0919-00-2	Washer CS 7.5, Titanium	33, 39

Subject to technical modifications,  
errors and misprints.

© aap Implantate AG  
WP 1KA020 EN / 2303-4

**aap Implantate AG**

Lorenzweg 5 • 12099 Berlin  
Germany

Phone +49 30 75019-0  
Fax +49 30 75019-111

[customer.service@aap.de](mailto:customer.service@aap.de)  
[www.aap.de](http://www.aap.de)



**aap Implantate AG**  
Lorenzweg 5 • 12099 Berlin  
Germany

Phone +49 30 75019-0  
Fax +49 30 75019-111

[customer.service@aap.de](mailto:customer.service@aap.de)  
[www.aap.de](http://www.aap.de)



(01)0404240933403 0(10)2303-4  
WP 1KA020 EN / 2303-4